

SAW Filter 1210.0MHz
Part No: MP01875

Model: TA0888A
Rev No: 1

A. MAXIMUM RATING:

1. Input Power Level: 10dBm
2. DC Voltage: 3V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -50°C to +95°C

B. ELECTRICAL CHARACTERISTICS:

1. Terminating source impedance (differential): $Z_S = 150\Omega // 36nH$
2. Terminating load impedance (differential): $Z_L = 150\Omega // 36nH$

Item	Unit	Min.	Typ.	Max.	Note
Center Frequency Fc	MHz	-	1210	-	-
Bandwidth at -2dB	MHz	60	77	-	-
Insertion Loss (1180 ~ 1240MHz)	dB	-	3.9	5	-
Amplitude ripple (1180 ~ 1240MHz)	dB	-	1	2	-
Phase error (1180 ~ 1240MHz) (3)	deg	-	3	5	-
I/O VSWR (1180 ~ 1240MHz)		-	1.6	2.5	-
CMDR (1180 ~ 1240MHz)	dB	22	25	-	-
Attenuation (1)					
50 ~ 1110MHz	dB	44	49	-	-
1320 ~ 3000MHz	dB	36	38.5	-	-
3000 ~ 4250MHz	dB	35	41	-	-
4000 ~ 6000MHz	dB	30	37	-	-


Notes:

1. The amplitude reference is insertion loss at Fc.
2. The amplitude ripple is defined as the max. level - min. level over any 36MHz block of the given bandwidth.
3. The phase error is measured over any 36MHz block of the given bandwidth.


SAW Filter 1210.0MHz
Part No: MP01875

Model: TA0888A
Rev No: 1


C. OUTLINE DRAWING:

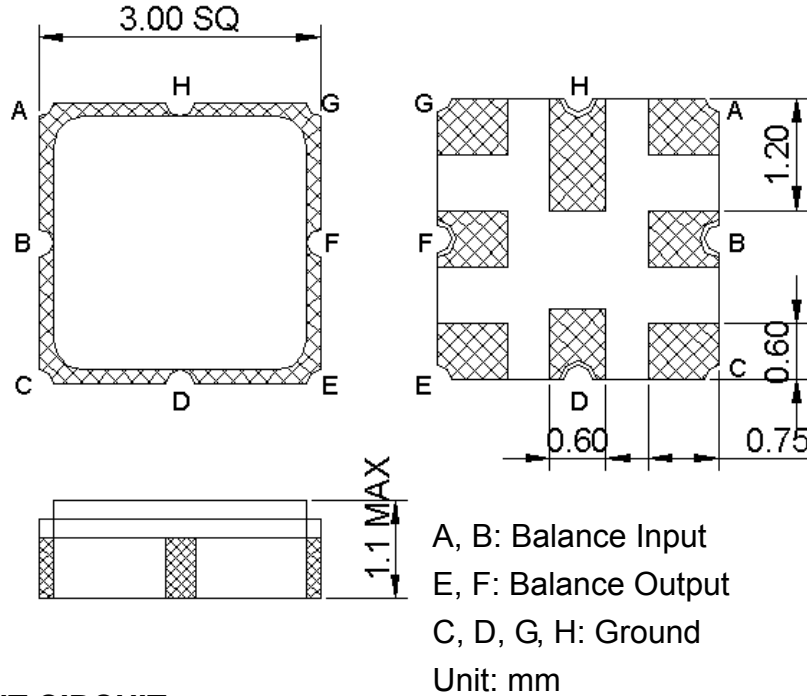

D. MEASUREMENT CIRCUIT:

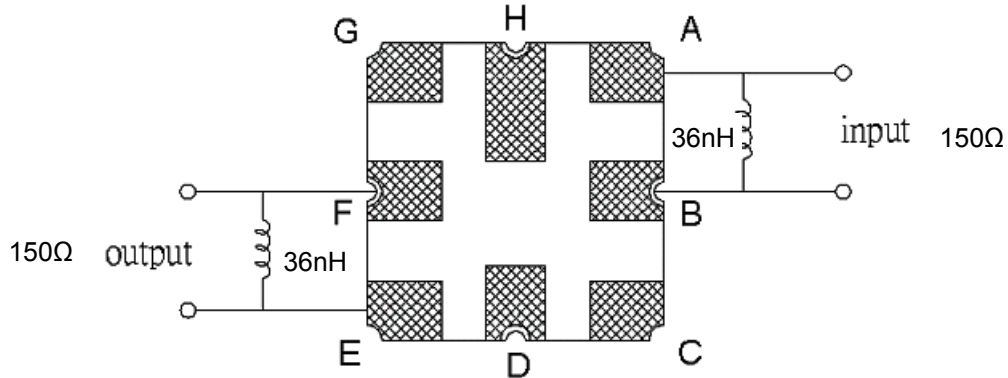


E. PCB FOOTPRINT:

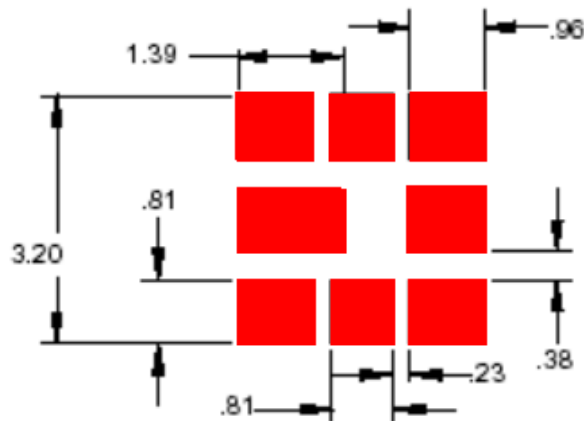

SAW Filter 1210.0MHz
Part No: MP01875


Model: TA0888A
Rev No: 1

F. FREQUENCY CHARACTERISTICS:

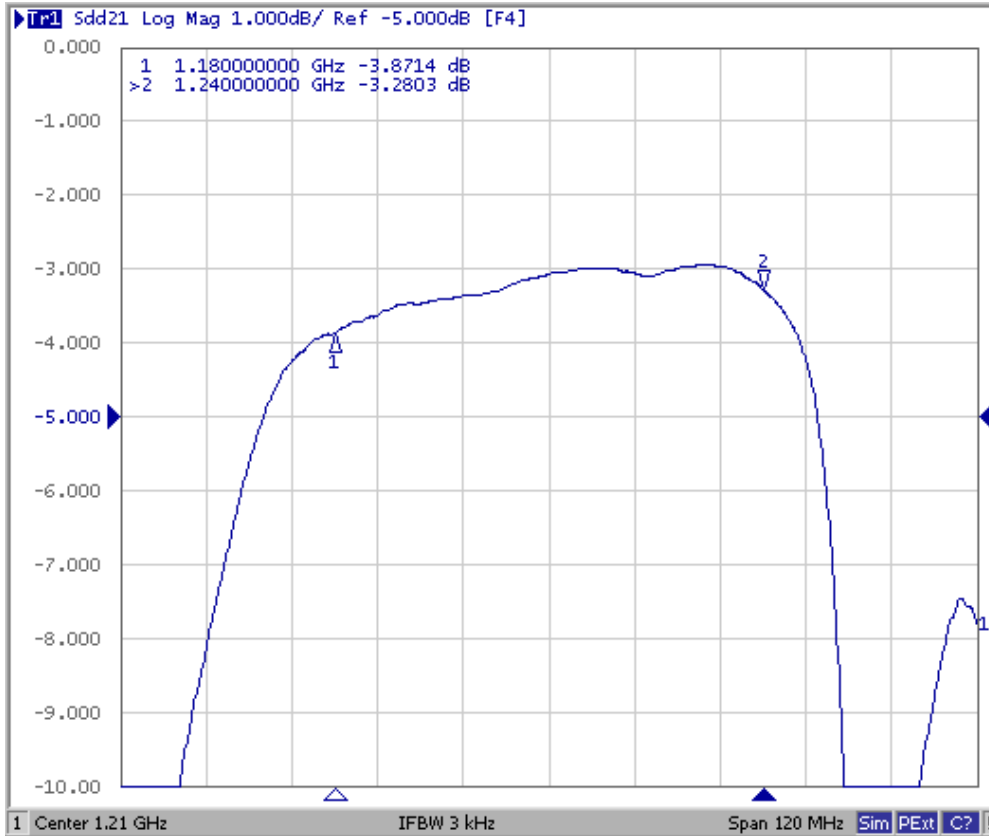

SAW Filter 1210.0MHz
Part No: MP01875

Model: TA0888A
Rev No: 1

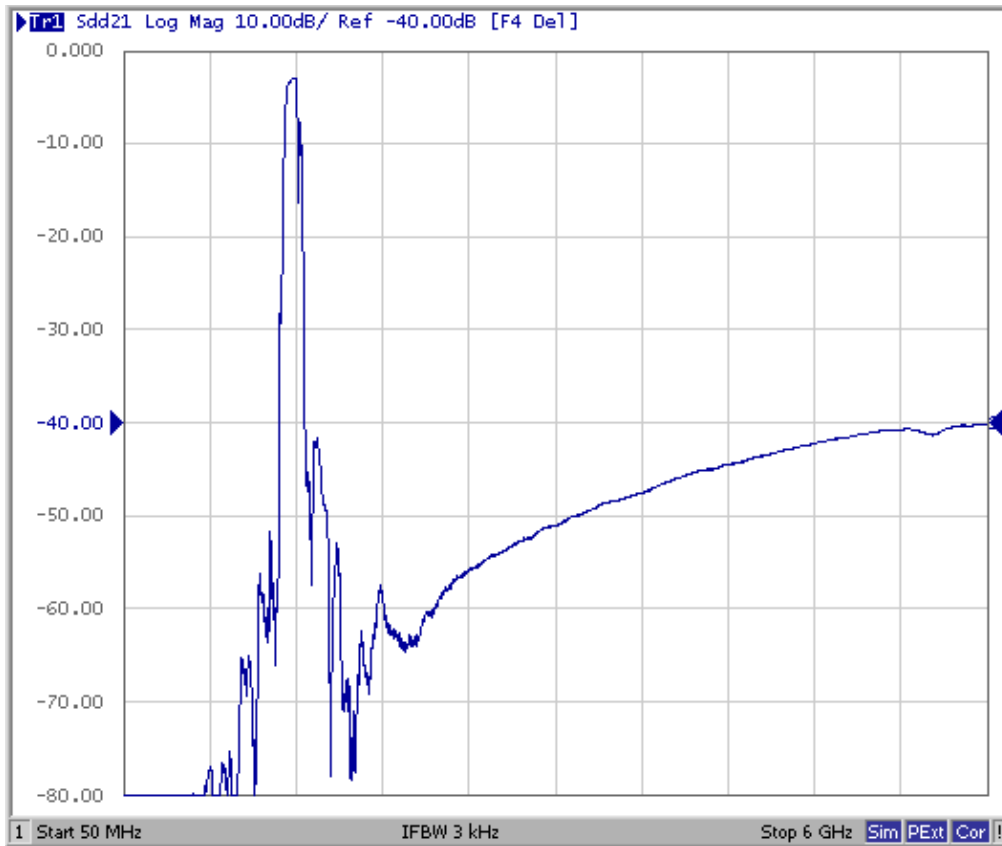


SAW Filter 1210.0MHz
Part No: MP01875


Model: TA0888A
Rev No: 1

Reflection Functions

S11

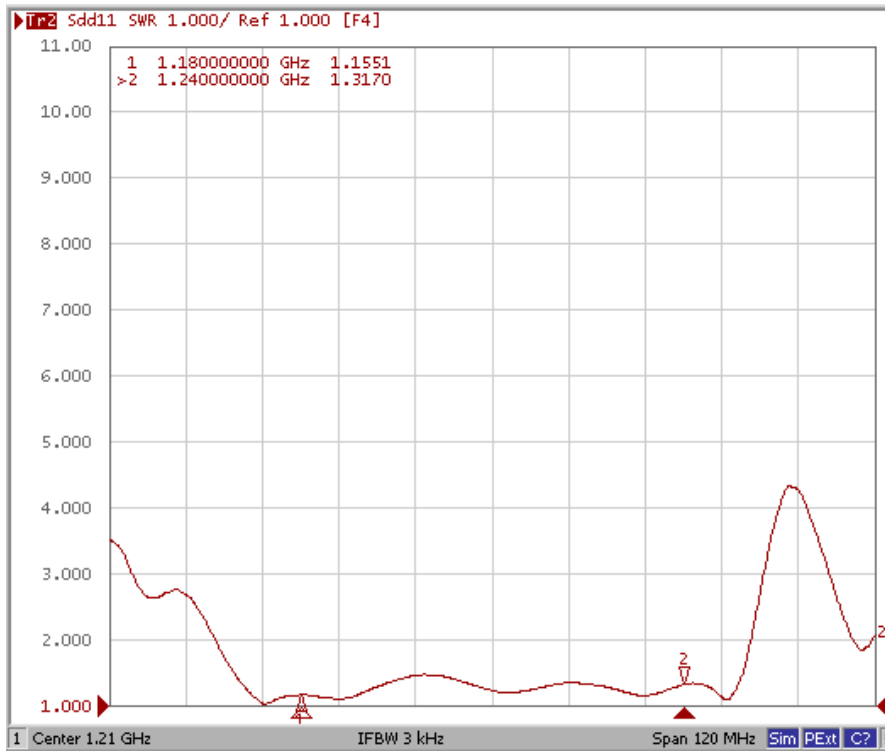

S22

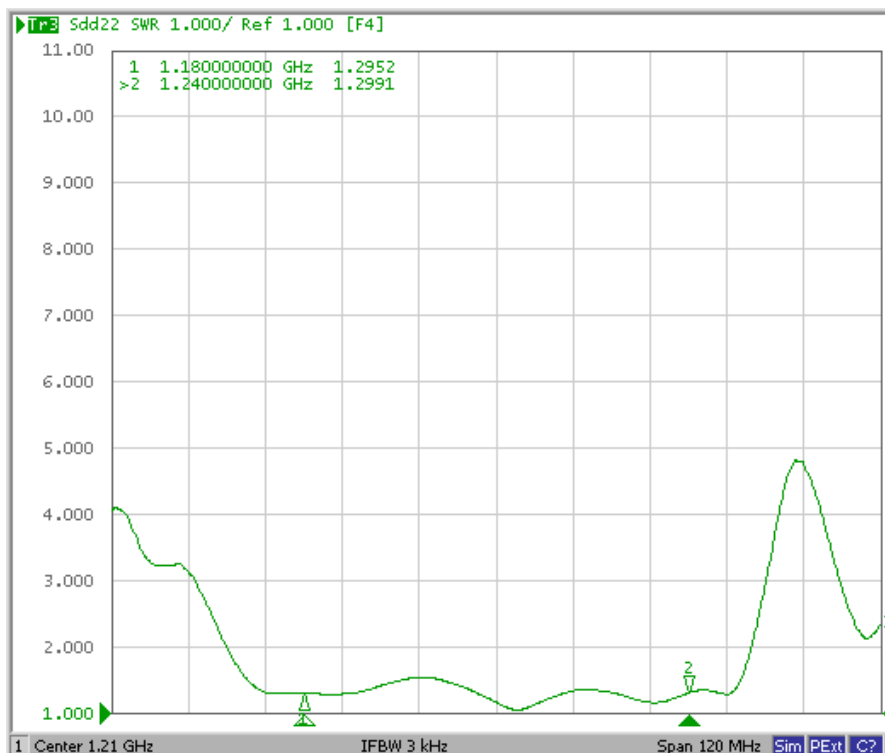


SAW Filter 1210.0MHz
Part No: MP01875


Model: TA0888A
Rev No: 1

G. PACKING:

1. Reel Dimension (Reel Count: 7" = 1000; 13" = 3000)

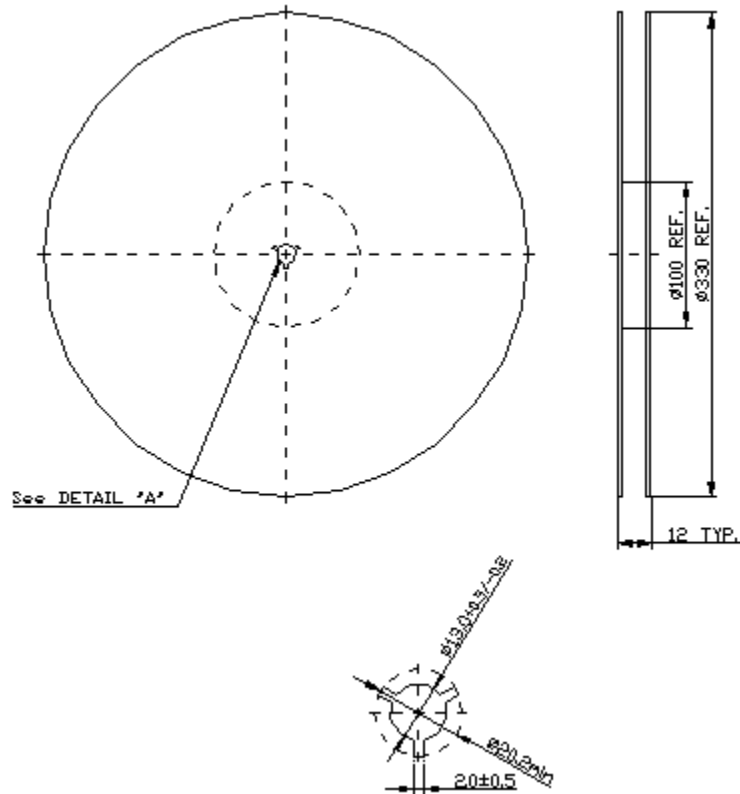

2. Tape Dimension

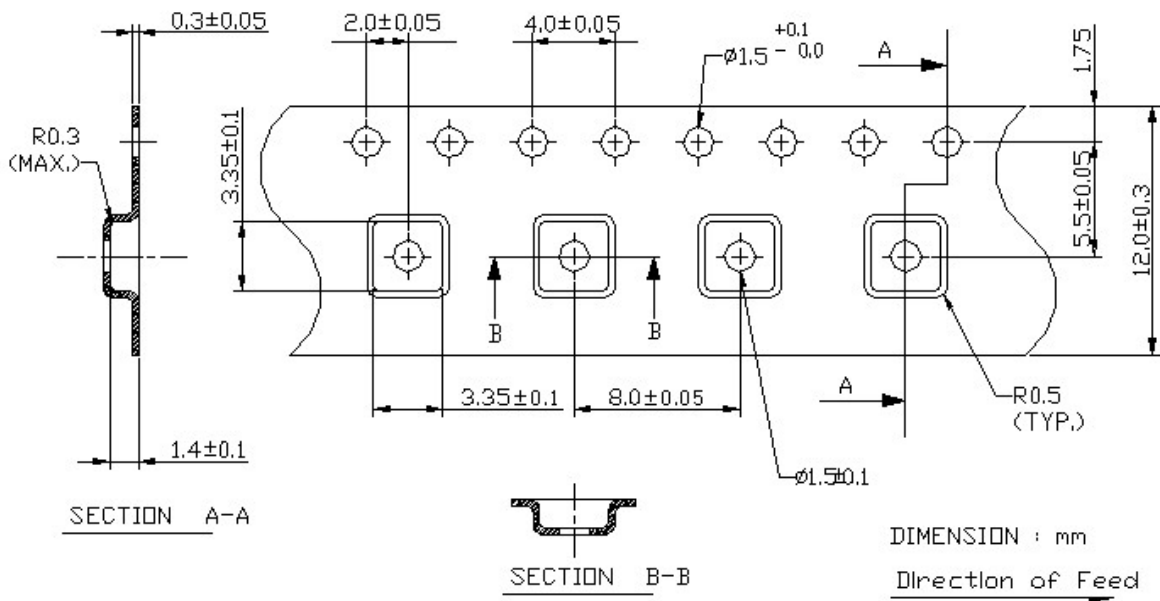

SAW Filter 1210.0MHz
Part No: MP01875

Model: TA0888A
Rev No: 1

H. RECOMMENDED REFLOW PROFILE:

