

SAW Filter 1994.6MHz
Part No: MP02675

Model: TA0885A
Rev No: 1

A. MAXIMUM RATING:

1. Input Power Level: 10dBm
2. DC Voltage: 3V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -50°C to +95°C

B. ELECTRICAL CHARACTERISTICS:

Terminating source impedance (differential): $Z_S = 150\Omega // 18nH$

Terminating load impedance (differential): $Z_L = 150\Omega // 18nH$

Item	Unit	Min.	Typ.	Max.	Note
Center Frequency Fc	MHz	-	1994.6	-	-
Bandwidth at -2dB	MHz	40	63	-	-
Insertion Loss in 1974.6 ~ 2014.6MHz	dB	-	2.6	5	-
Amplitude ripple (1974.6MHz ~ 2014.6MHz)	dB	-	0.6	2	-
Phase error (1974.6MHz ~ 2014.6MHz) (3)	deg	-	2.7	5	-
Group Delay ripple (1974.6MHz ~ 2014.6MHz)	ns	-	5	25	-
I/O VSWR (1974.6MHz ~ 2014.6MHz)		-	1.4	2.5	-
Attenuation (1)					
50 ~ 1912.5MHz	dB	44	49	-	-
2076.7 ~ 2150MHz	dB	44	58	-	-
2150 ~ 4250MHz	dB	38	45	-	-
4250 ~ 6000MHz	dB	30	41	-	-

Notes:

The amplitude reference is insertion loss at Fc.


The amplitude ripple is defined as the max. level - min. level over any 30MHz block of the given bandwidth.

The phase error is measured over any 30MHz block of the given bandwidth.


SAW Filter 1994.6MHz
Part No: MP02675

Model: TA0885A
Rev No: 1

C. OUTLINE DRAWING:

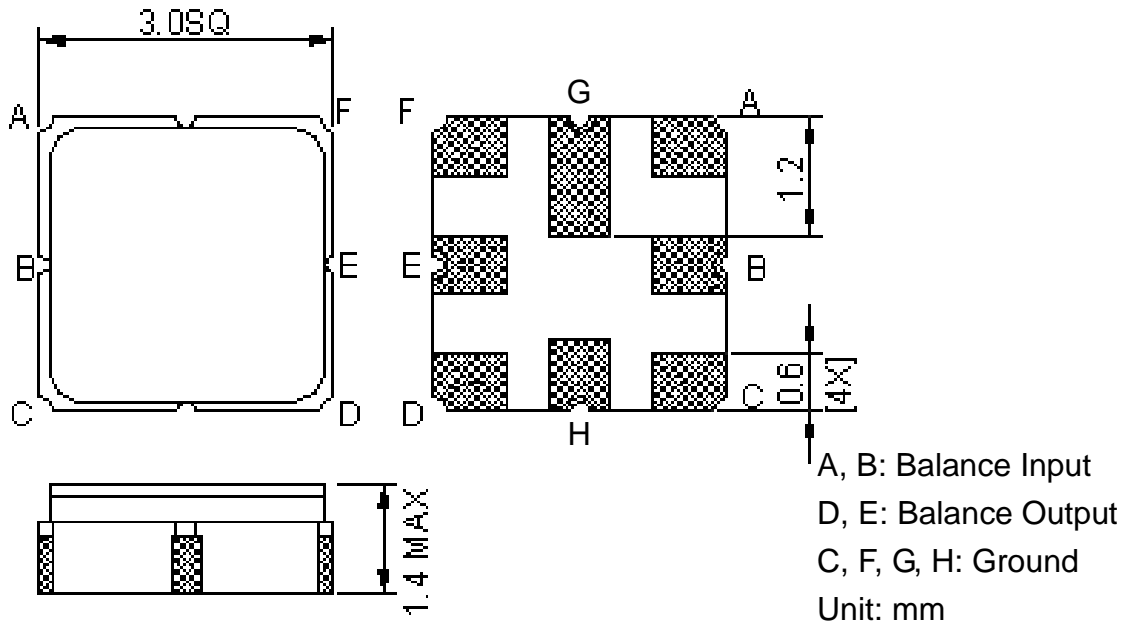


D. MEASUREMENT CIRCUIT:

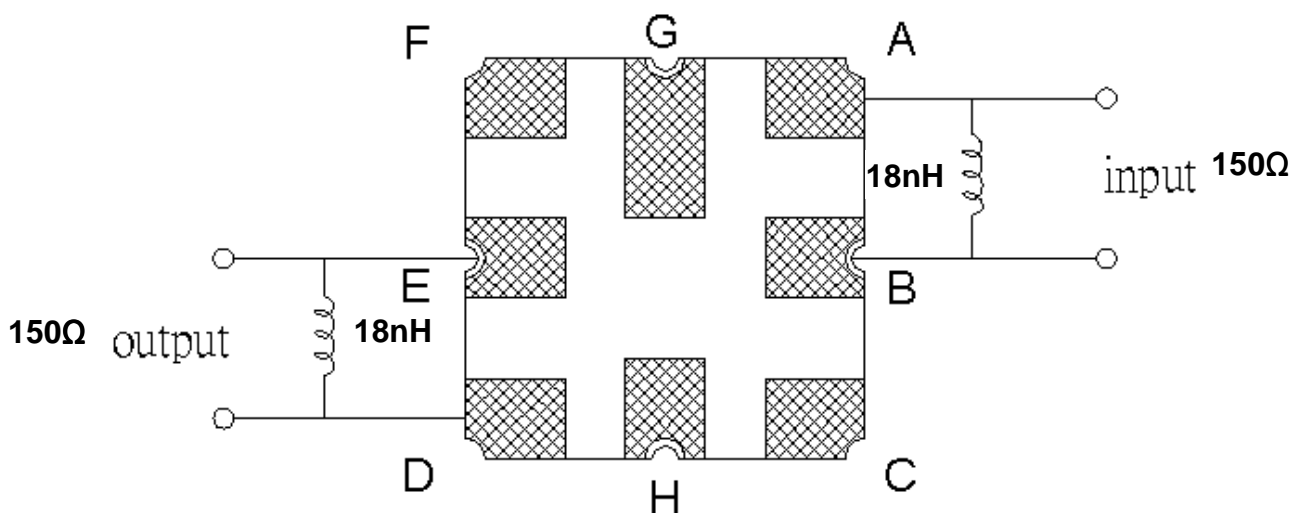

SAW Filter 1994.6MHz
Part No: MP02675

Model: TA0885A
Rev No: 1



E. PCB FOOTPRINT:

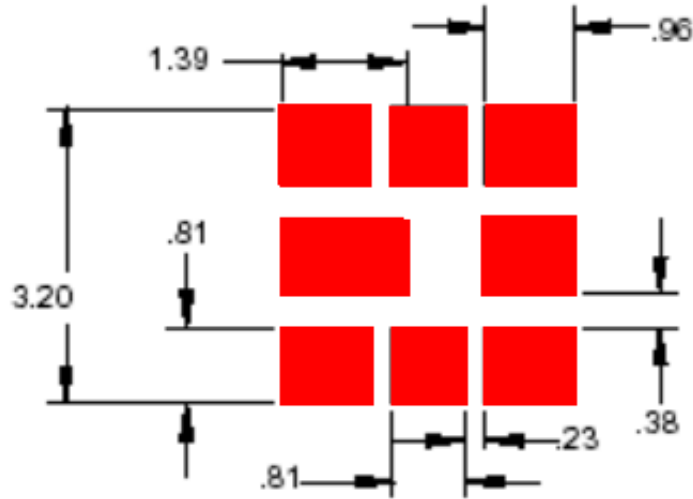

SAW Filter 1994.6MHz
Part No: MP02675


Model: TA0885A
Rev No: 1

F. FREQUENCY CHARACTERISTICS:

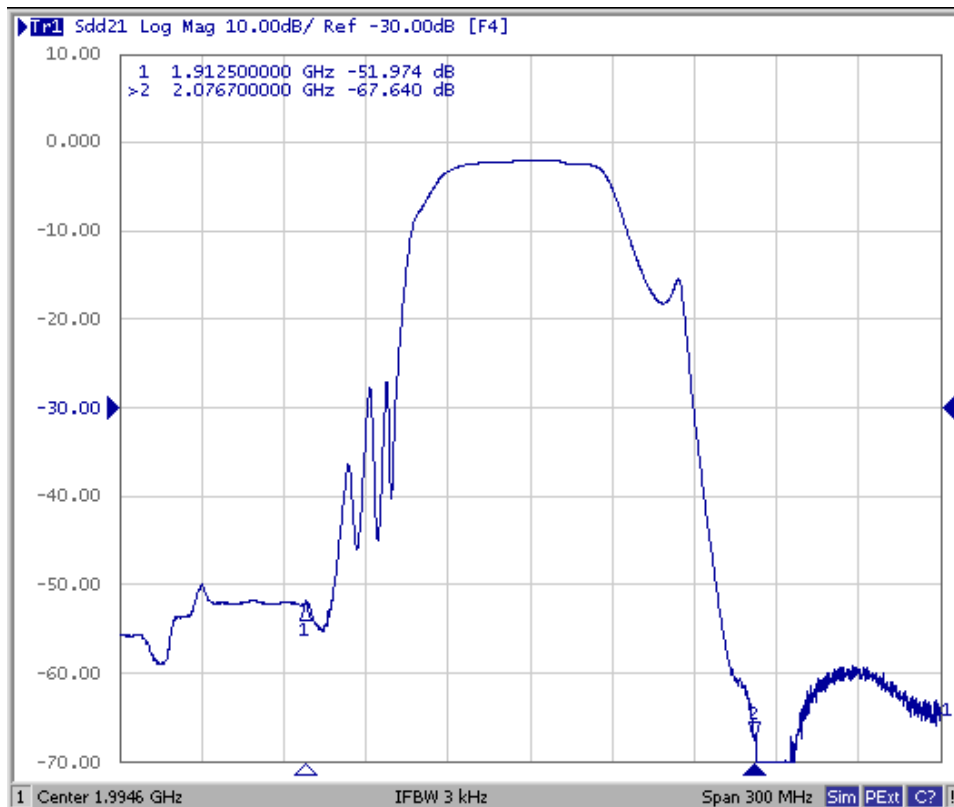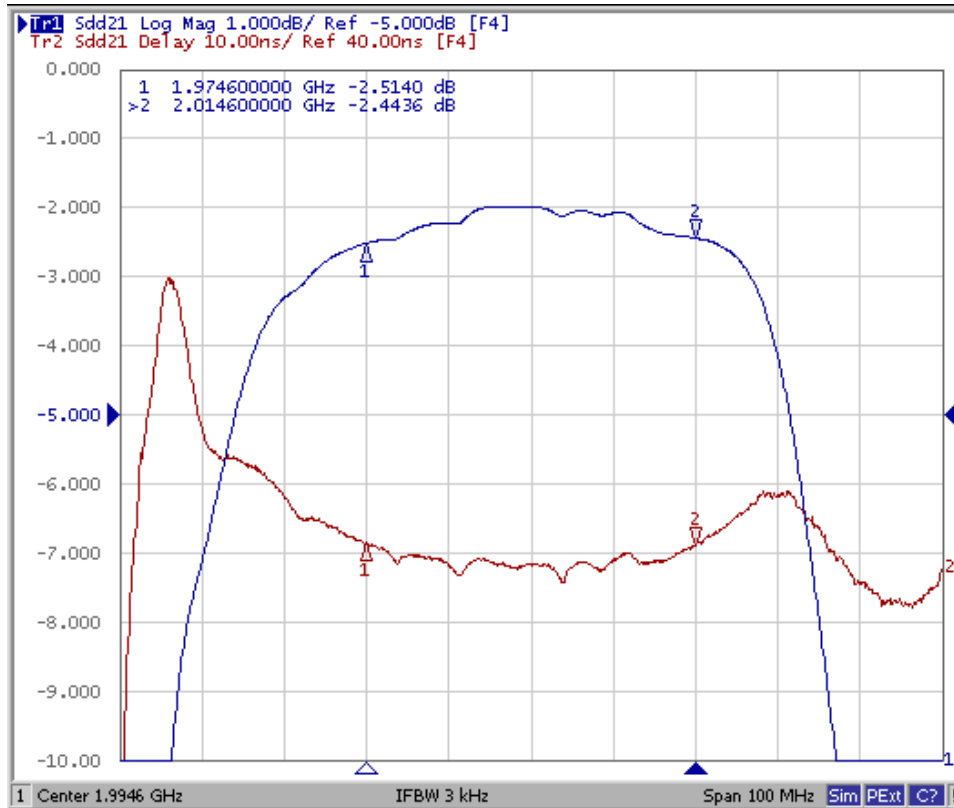

SAW Filter 1994.6MHz
Part No: MP02675

Model: TA0885A
Rev No: 1

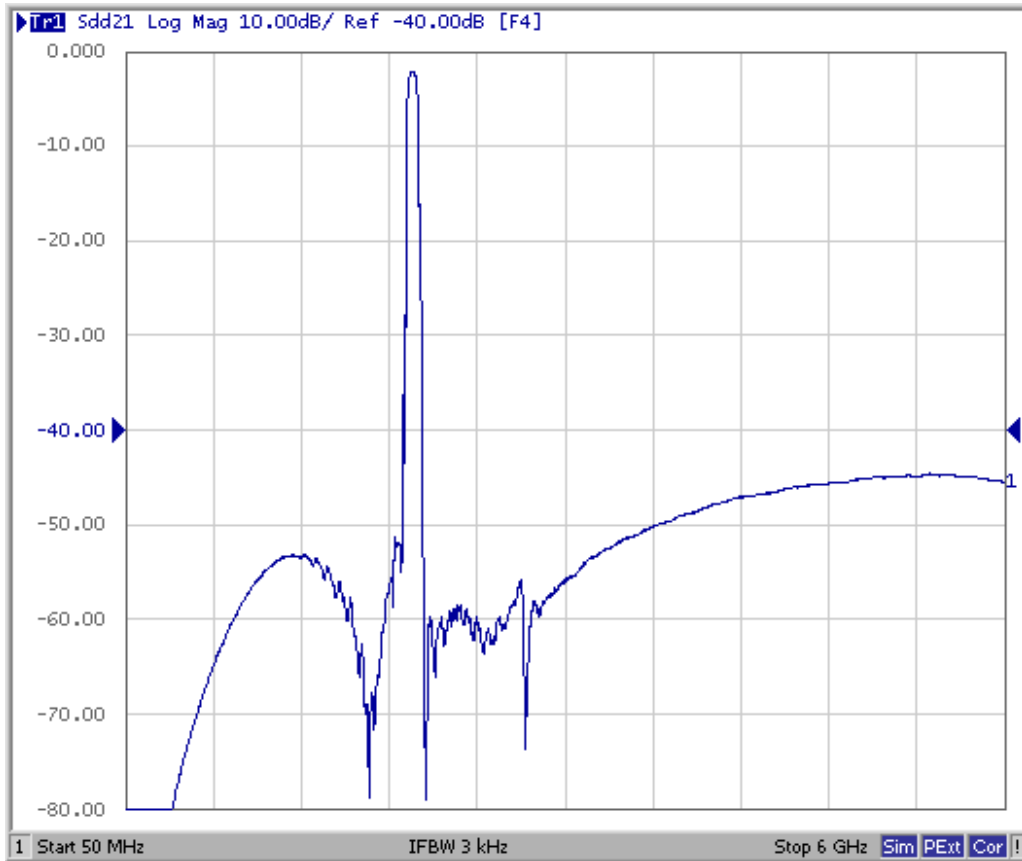


SAW Filter 1994.6MHz
Part No: MP02675


Model: TA0885A
Rev No: 1

Reflection Functions

S11

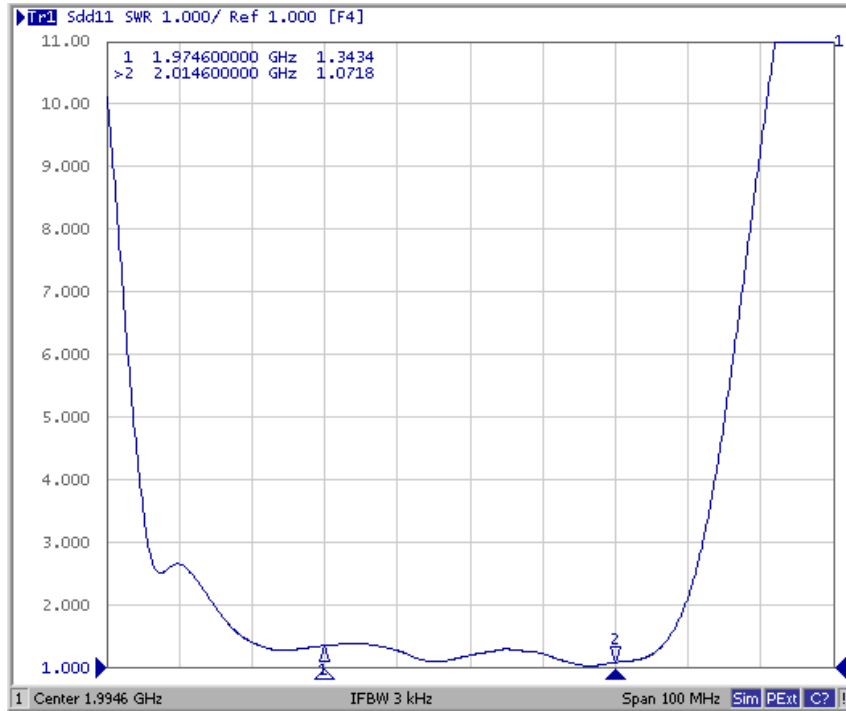

S22

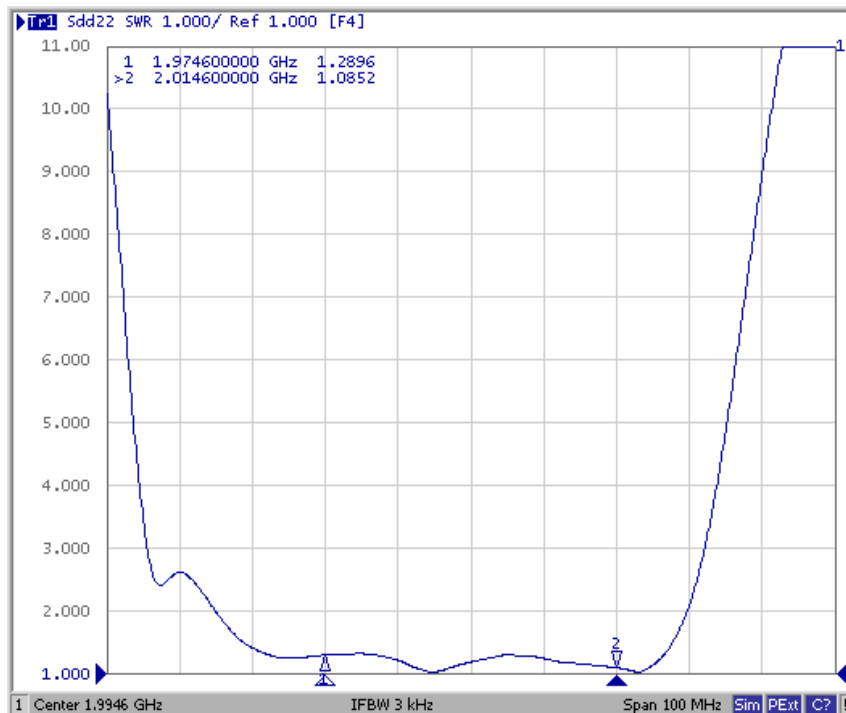


SAW Filter 1994.6MHz
Part No: MP02675

Model: TA0885A
Rev No: 1


G. PACKING:

1. REEL DIMENSION

(Reel Count: 7" = 1000; 13" = 3000)

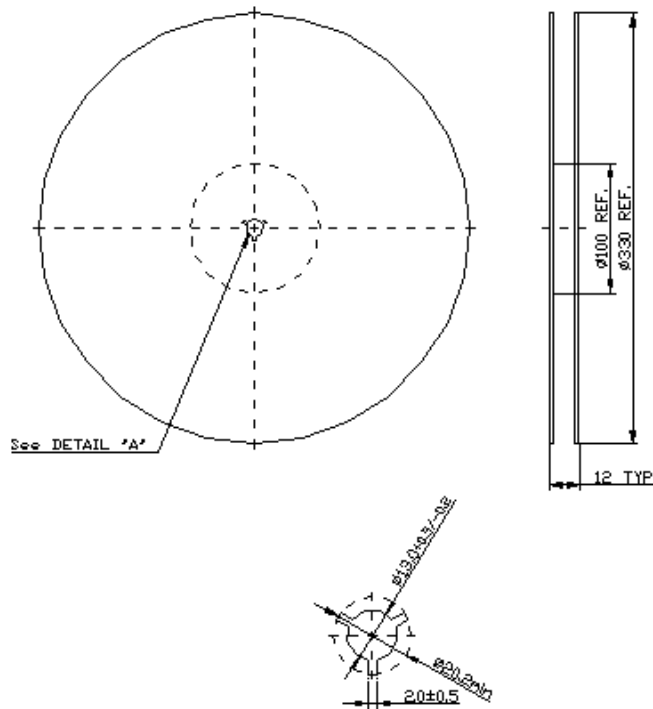

2. TAPE DIMENSION

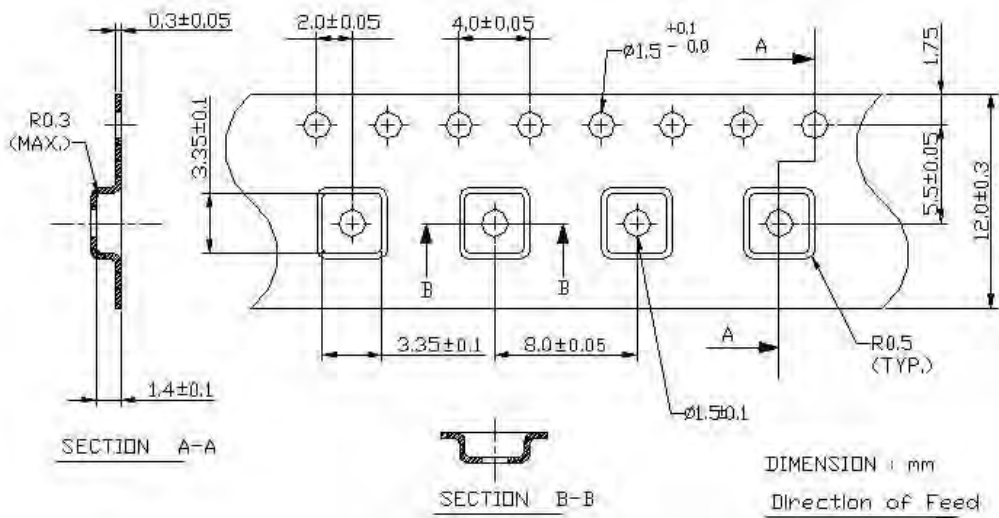

SAW Filter 1994.6MHz
Part No: MP02675

Model: TA0885A
Rev No: 1

H. RECOMMENDED REFLOW PROFILE:

