

SAW Filter 897.0MHz

Model: TA1701A

Part No: MP05871

Rev No: 1

A. MAXIMUM RATING:

Electrostatic Sensitive Device (ESD)

1. Input Power Level: 10dBm
2. DC Voltage: 3V
3. Operating Temperature: -30°C to +85°C
4. Storage Temperature: -40°C to +85°C

B. ELECTRICAL CHARACTERISTICS:

1. Terminating source impedance: $Z_S = 50\Omega$
2. Terminating load impedance: $Z_L = 50\Omega$

Item	Unit	Min.	Typ.	Max.
Center Frequency (Fc)	MHz	-	897	-
Insertion Loss within 880.4 ~ 914.6MHz	dB	-	2.6	3.8
Amplitude Ripple within 880.4 ~ 914.6MHz	dB p-p	-	1.2	2.5
Input VSWR within 880.0 ~ 915.0MHz	-	-	1.9	2.4
Output VSWR within 880.0 ~ 915.0MHz	-	-	2.0	2.8
Attenuation:				
DC ~ 835.0MHz	dB	35	47	-
835.0 ~ 870.0MHz	dB	18	36	-
925.4 ~ 935.0MHz	dB	20	38	-
935.0 ~ 960.0MHz	dB	35	44	-
960.0 ~ 1760.0MHz	dB	30	40	-
1760.0 ~ 1830.0MHz	dB	28	39	-
1830.0 ~ 2640.0MHz	dB	25	34	-
2640.0 ~ 2745.0MHz	dB	25	34	-
2745.0 ~ 5000.0MHz	dB	15	26	-
5000.0 ~ 6000.0MHz	dB	10	20	-



Notes: No Matching Network.

SAW Filter 897.0MHz
Part No: MP05871

Model: TA1701A
Rev No: 1

C. FREQUENCY CHARACTERISTICS:


Frequency Response

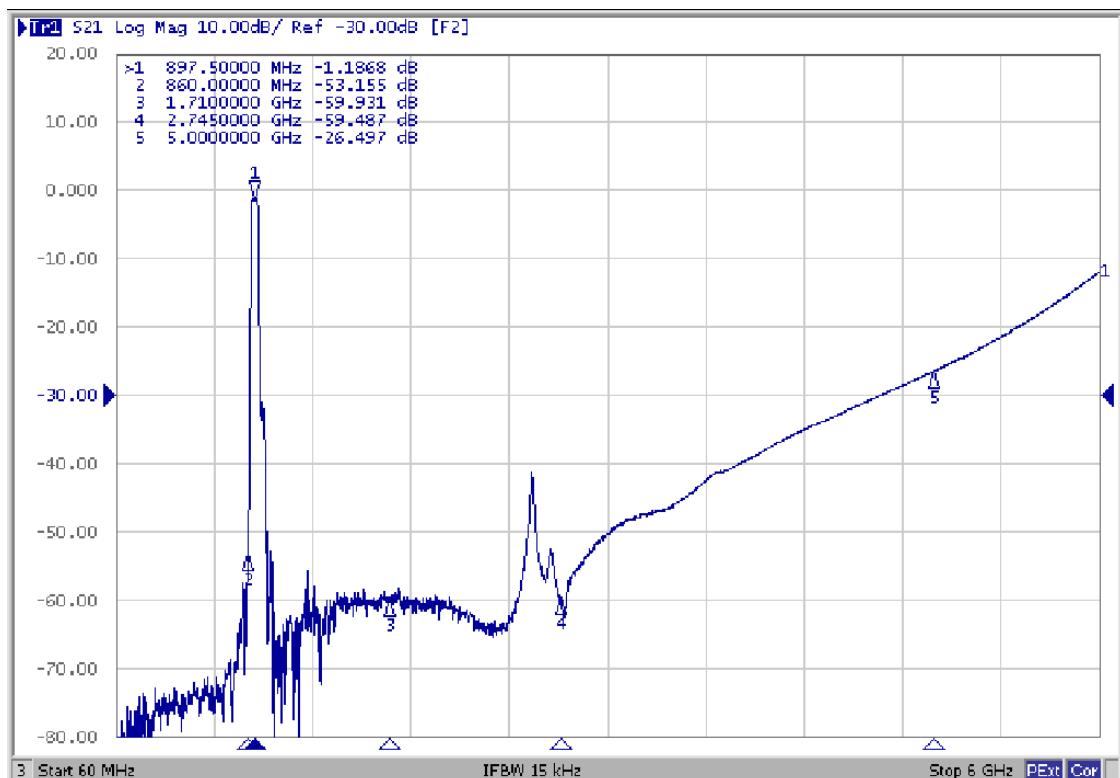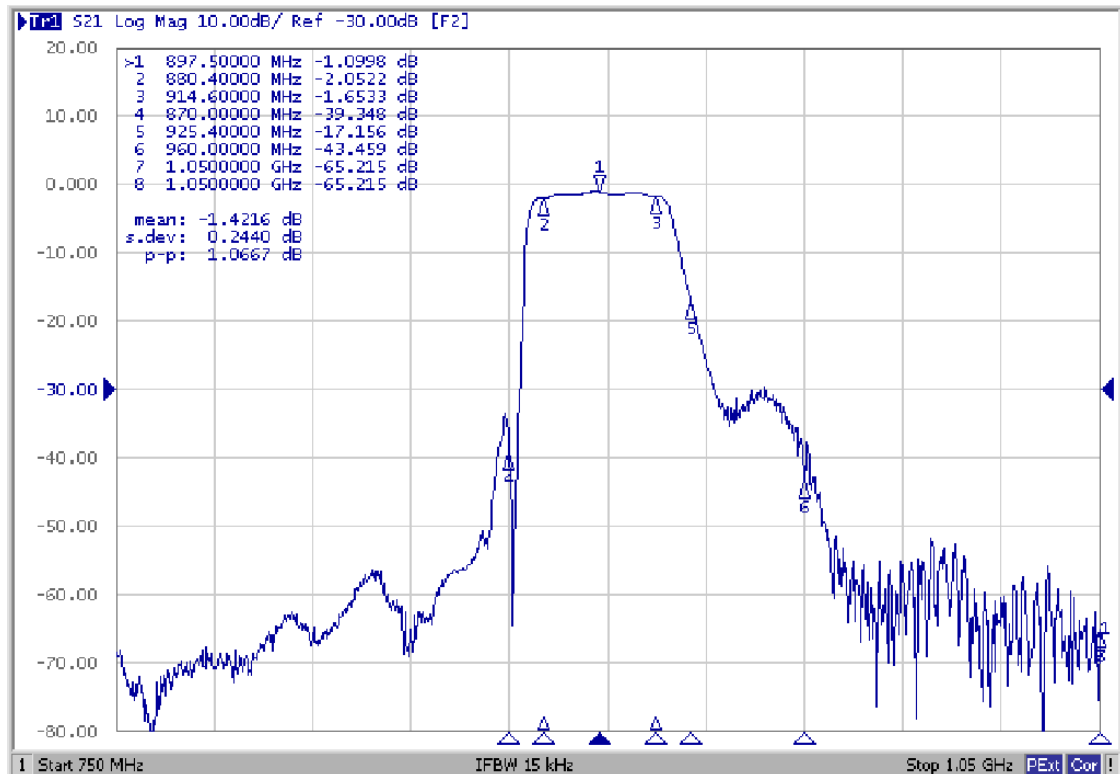


SAW Filter 897.0MHz
Part No: MP05871

Model: TA1701A
Rev No: 1

VSWR

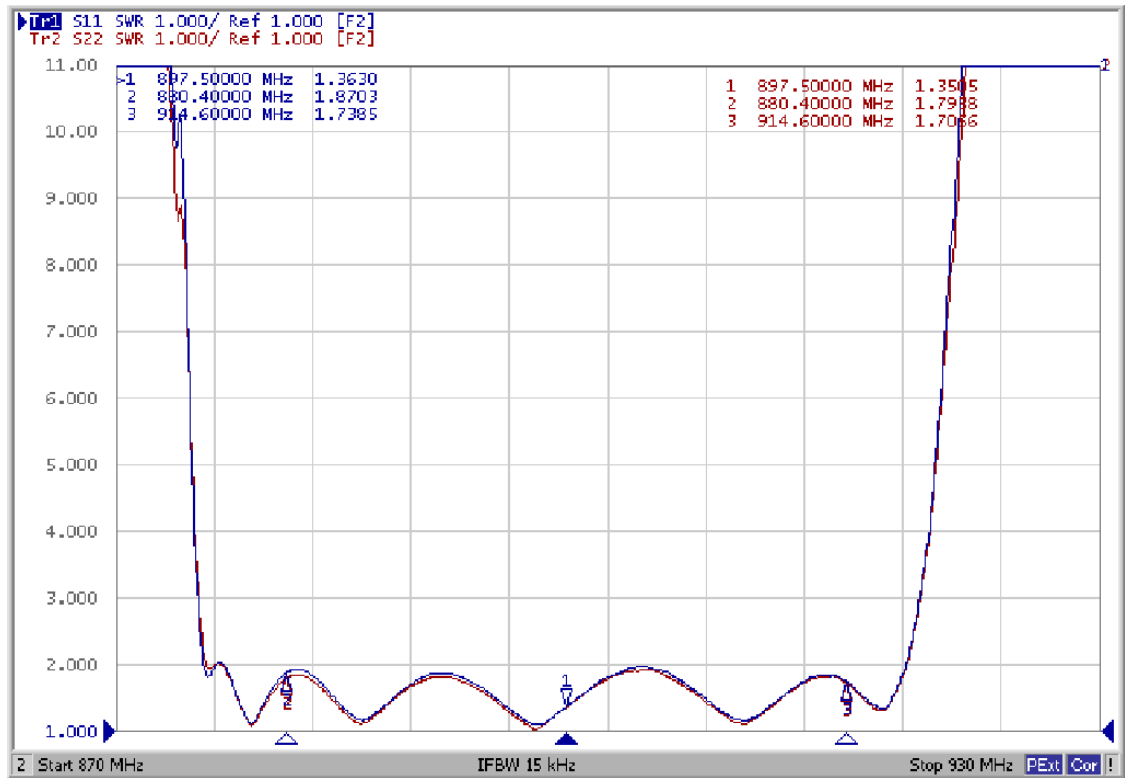



Ripple

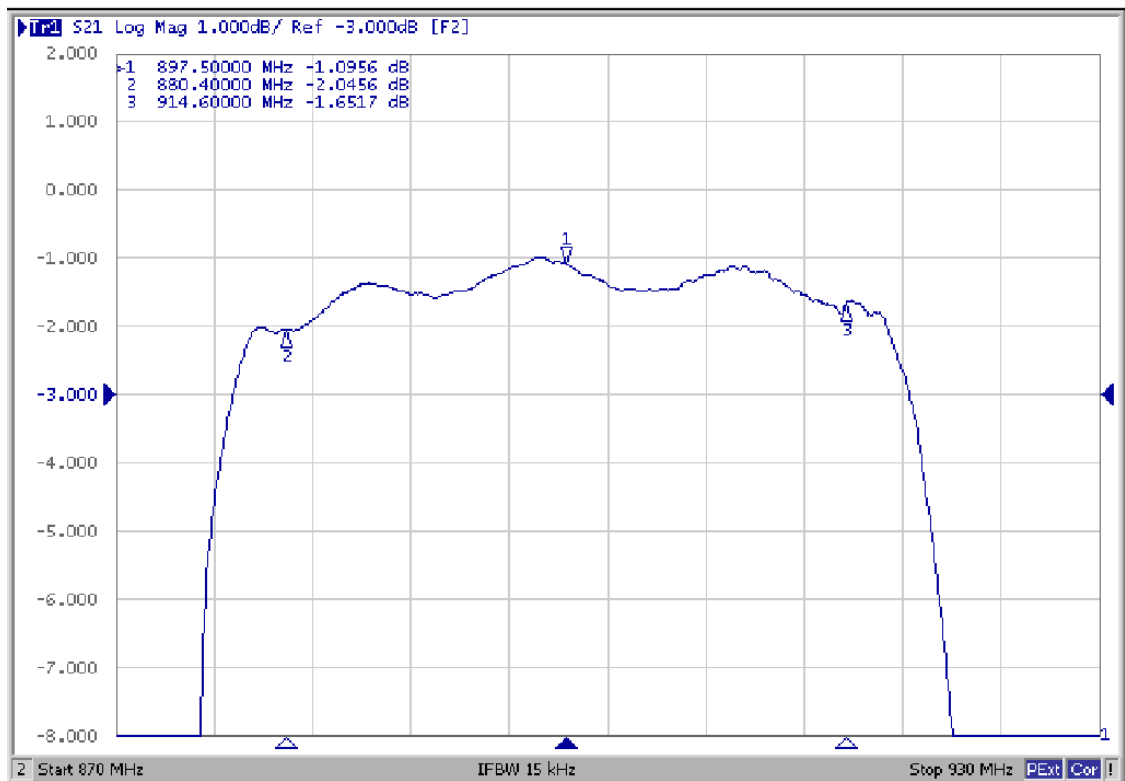

SAW Filter 897.0MHz
Part No: MP05871

Model: TA1701A
Rev No: 1

Smith Chart

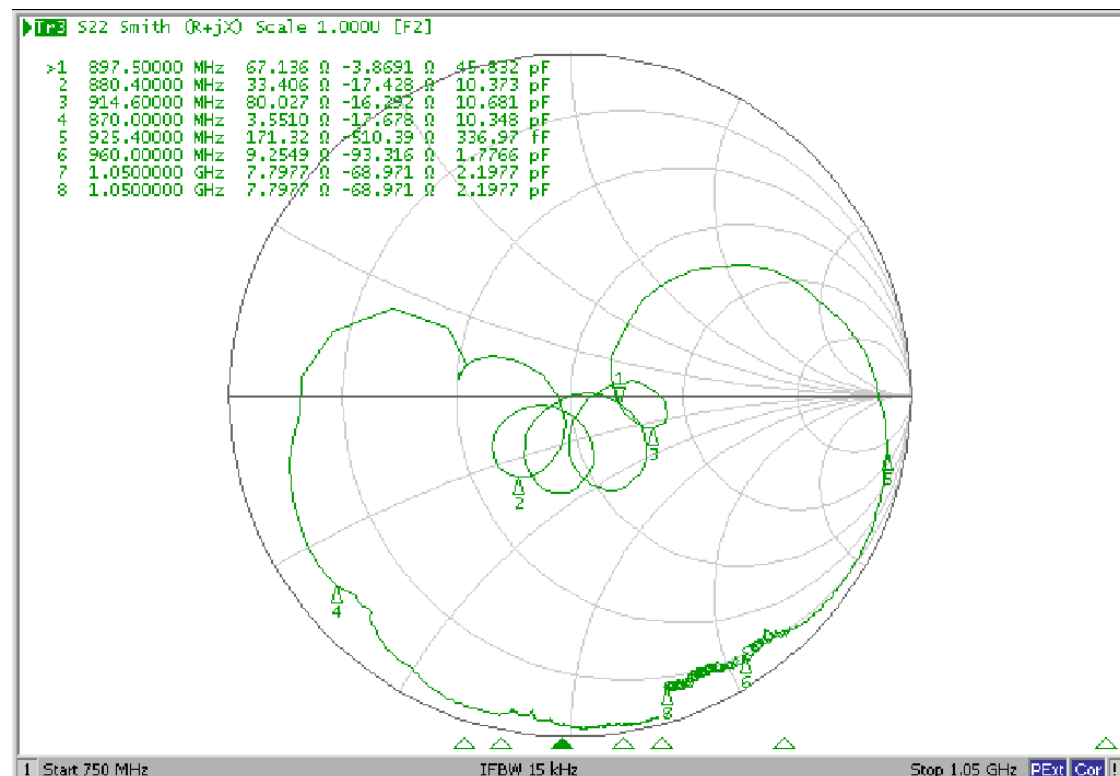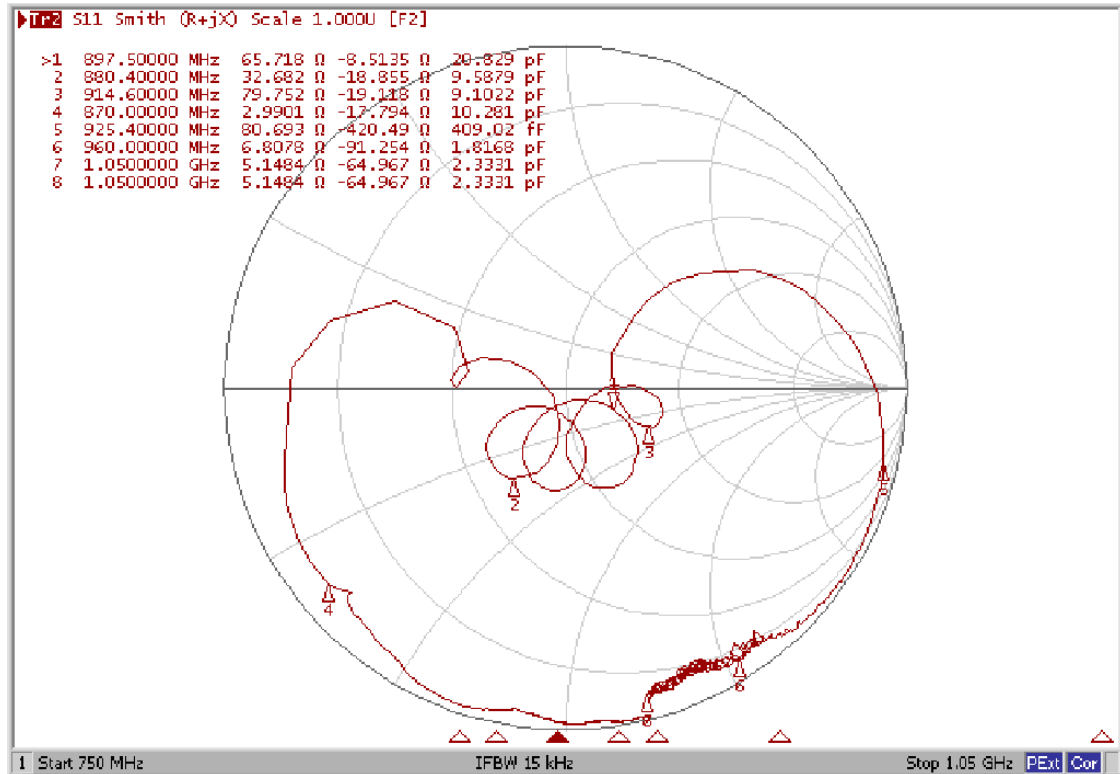


SAW Filter 897.0MHz

Model: TA1701A

Part No: MP05871


Rev No: 1

D. OUTLINE DRAWING:

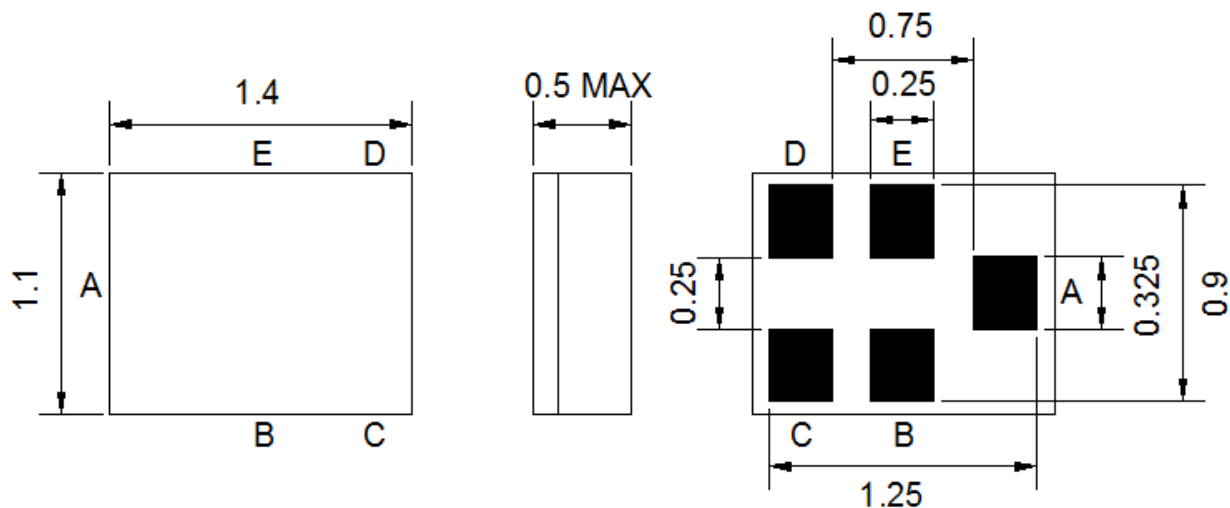

B, C, E: Ground
 A: Input
 D: Output

E. MEASUREMENT CIRCUIT:

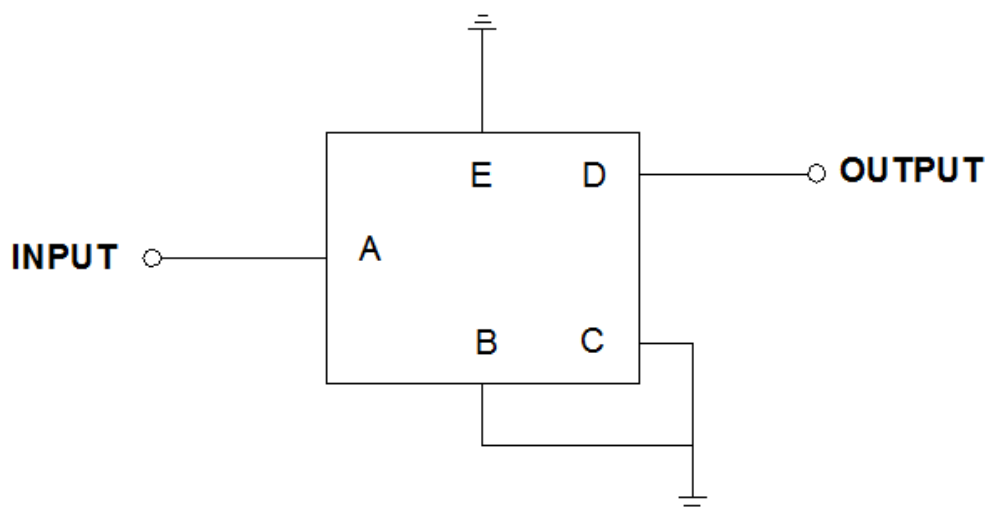


Source & Load Impedance: 50Ω

SAW Filter 897.0MHz
Part No: MP05871


Model: TA1701A
Rev No: 1

F. PACKING:

1. Reel Dimension (Please refer to Fr-75d10 for packing quantity)

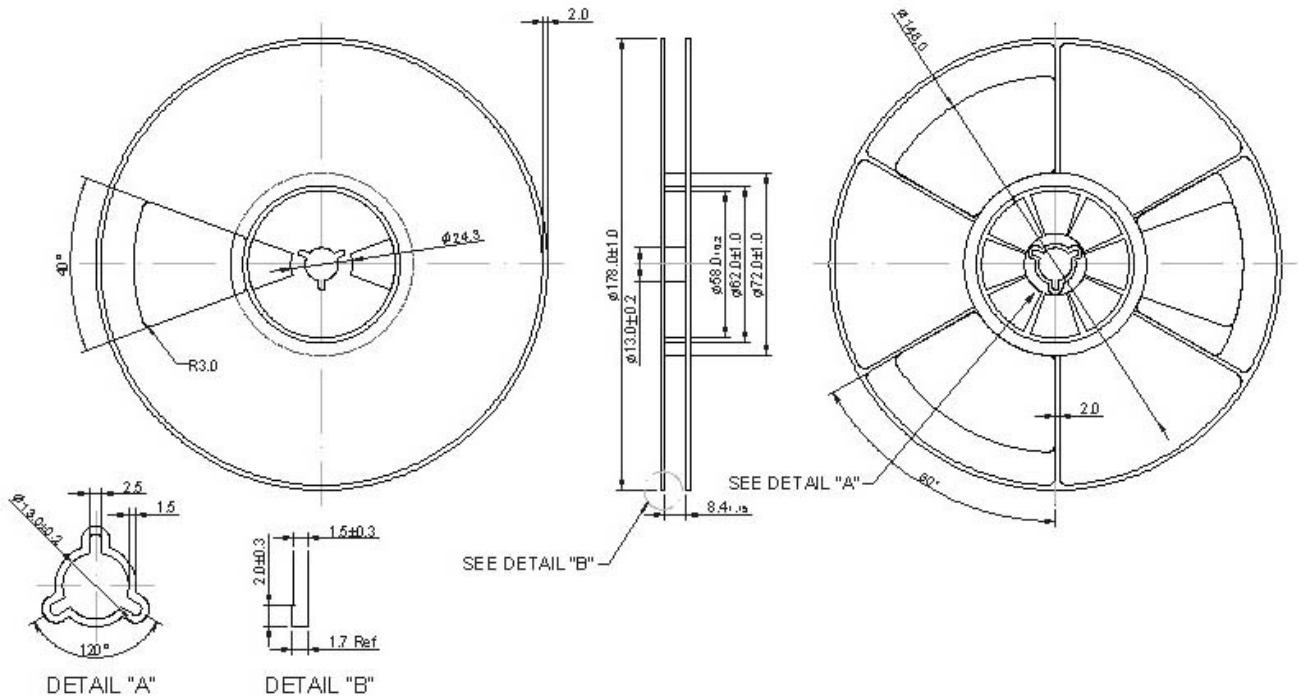

2. Tape Dimension

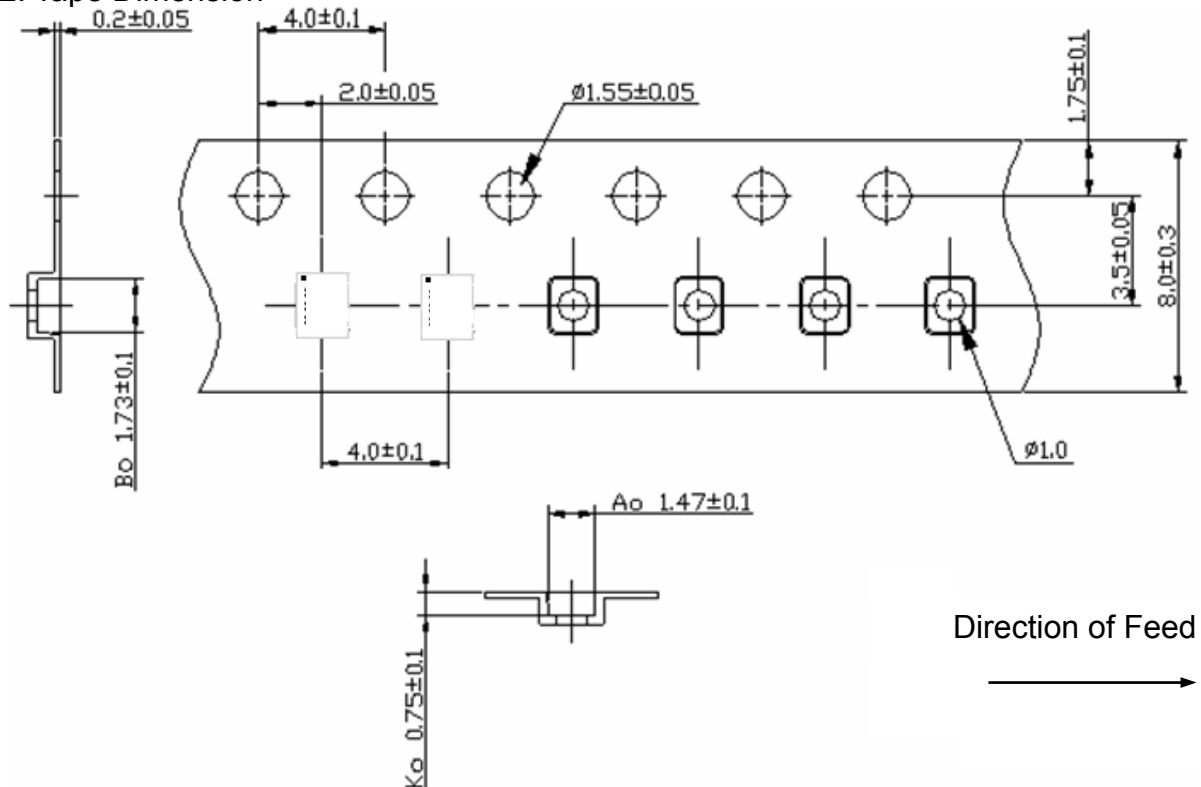

SAW Filter 897.0MHz
Part No: MP05871

Model: TA1701A
Rev No: 1

G. RECOMMENDED REFLOW PROFILE:

