
190.0 MHz SAW Filter**Model: TB0190A****Part No: MA05609****REV NO.: 2**

A. MAXIMUM RATING:

1. Input Power Level: +10 dBm
2. Operating Temperature: 0°C to +70°C
3. Storage Temperature: -20°C to +85°C

B. ELECTRICAL CHARACTERISTICS:


Parameter	Unit	Min.	Typ.	Max.
Center frequency, Fc	MHz	189.9	190	190.1
Insertion Loss, IL	dB	-	4.7	7
3dB Bandwidth	MHz	4.6	6	-
Amplitude Ripple within ± 2 MHz	dB	-	0.9	2.0
Group Delay Ripple within ± 2 MHz	nsec	-	70	100
Rejection (Reference level from 0 dB)				
from ± 5.0 MHz to ± 7.5 MHz	dB	10	19	-
from ± 7.5 MHz to ± 12.5 MHz	dB	25	33	-
from ± 12.5 MHz to ± 15 MHz	dB	35	37	-
from ± 15 MHz to ± 100 MHz	dB	40	43	-

190.0 MHz SAW Filter
Part No: MA05609

Model: TB0190A
REV NO.: 2

C. FREQUENCY CHARACTERISTICS:

(1) S21 Response:

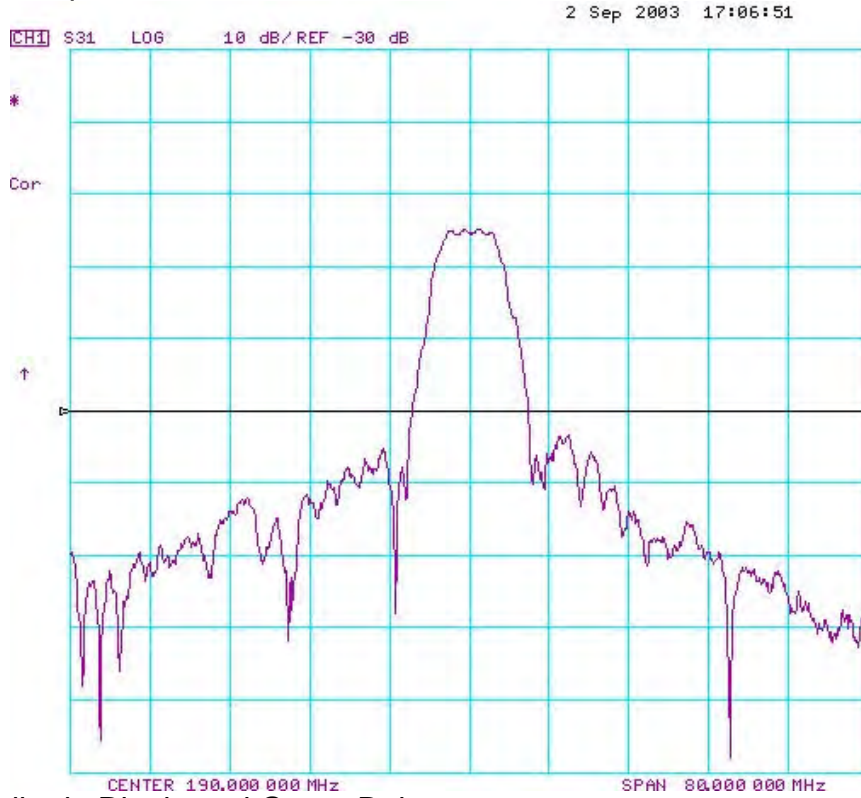

(2) Amplitude Ripple and Group Delay




190.0 MHz SAW Filter
Part No: MA05609


Model: TB0190A
REV NO.: 2

D. MEASUREMENT CIRCUIT:

For 50 ohm Unbalanced Input and Output

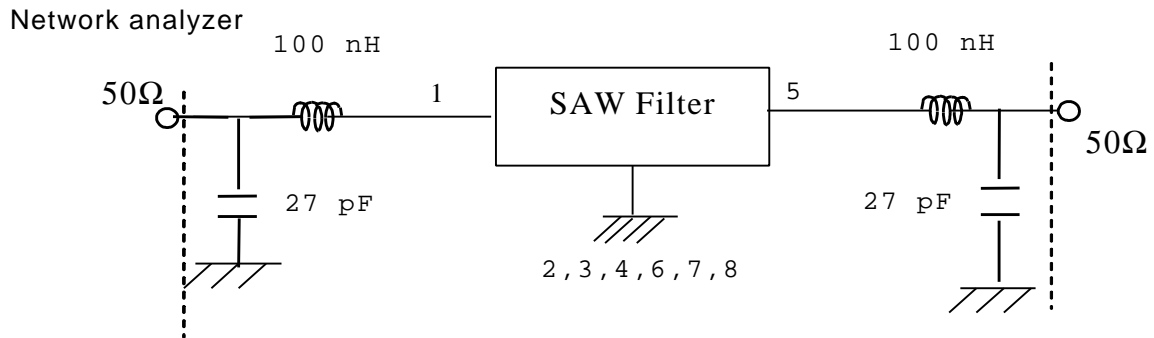

E. OUTLINE DRAWING:

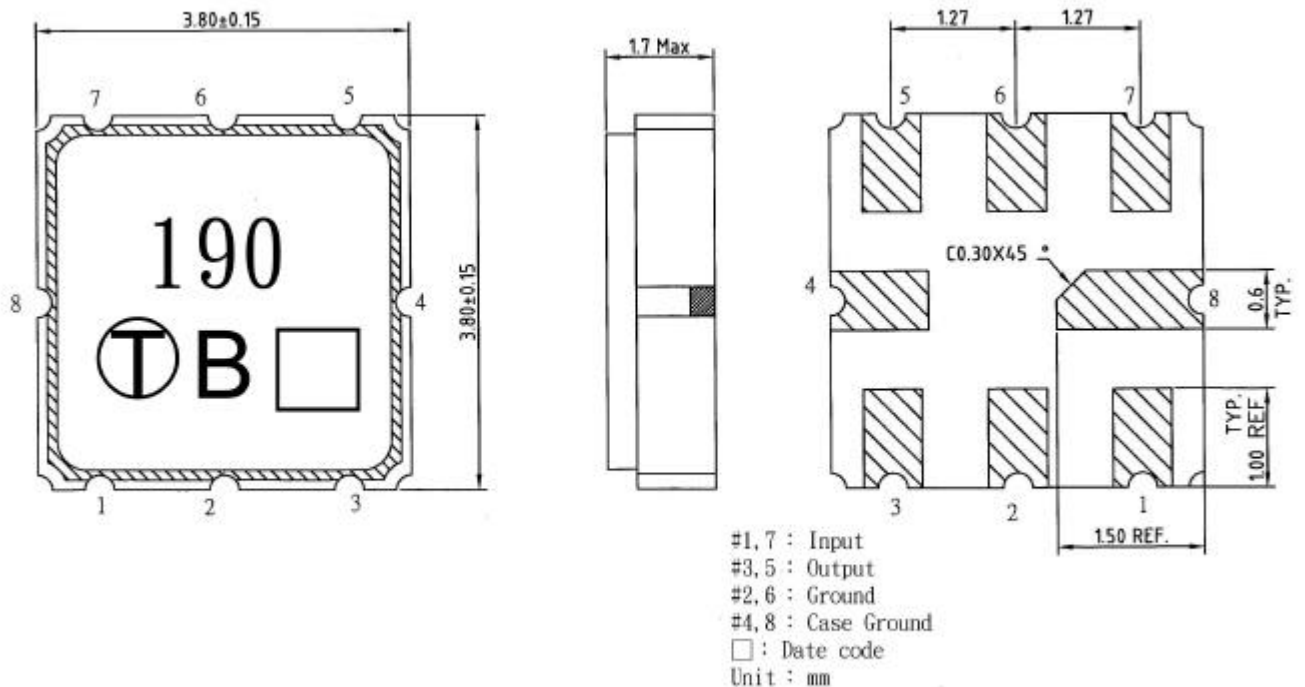


190.0 MHz SAW Filter
Part No: MA05609

Model: TB0190A
REV NO.: 2

F. PACKING:

1. Reel dimension

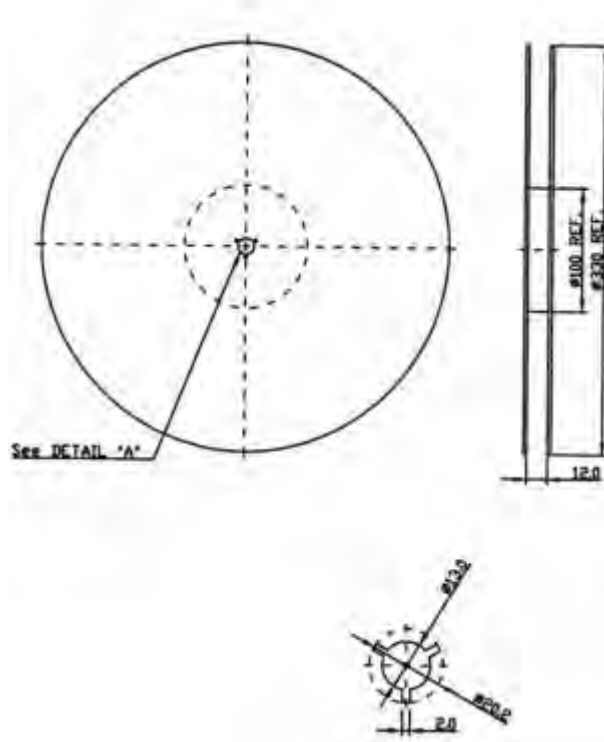

2. Tape dimension

