

SAW Filter 479.50MHz (Two channel)

Model: TE0103A

Part No: MA07470

REV. NO.: 1

A. MAXIMUM RATING:

1. AC Voltage Vac: 5V
2. Operating Temperature: -25°C to 85°C
3. Storage Temperature: -40°C to 85°C

B. ELECTRICAL CHARACTERISTICS OF CHANNEL 1:

Item	Unit	Min.	Type.	Max.
Center frequency, Fc	MHz	-	479.5	-
Insertion Loss, IL at Fc	dB	-	21.8	23.5
Passband width, BW3	MHz	26	27	28
Amplitude Ripple in Fc±8.5MHz	dB	-	0.6	1.0
Group delay ripple in Fc±13.5MHz	nS	-	18	28
Attenuation:(Reference level from IL)				
Fc -13.5MHz	dB	-	3.2	4.5
Fc +13.5MHz	dB	-	2.4	4.5
Fc -50 to -27.5MHz	dB	36	43	-
Fc +27.5 to +50MHz	dB	34	42	-
Temperature coefficient of frequency	ppm/°C	-	-86	-

C. ELECTRICAL CHARACTERISTICS OF CHANNEL 2:


Item	Unit	Min.	Type.	Max.
Center frequency, Fc	MHz	-	479.5	-
Insertion Loss, IL at Fc	dB	-	21.4	23
Passband width, BW3	MHz	17	18	19
Amplitude Ripple in Fc±3.5MHz	dB	-	0.4	0.8
Group delay ripple in Fc±9MHz	nS	-	12	22
Attenuation:(Reference level from IL)				
Fc -9MHz	dB	-	3.5	4.5
Fc +9MHz	dB	-	2.5	4.5
Fc -50 to -22MHz	dB	36	44	-
Fc +21 to +50MHz	dB	34	42	-
Temperature coefficient of frequency	ppm/°C	-	-86	-

SAW Filter 479.50MHz (Two channel)
Part No: MA07470


Model: TE0103A
REV. NO.: 1

D.FREQUENCY CHARACTERISTICS OF CHANNEL 1:

(1) Frequency Response:

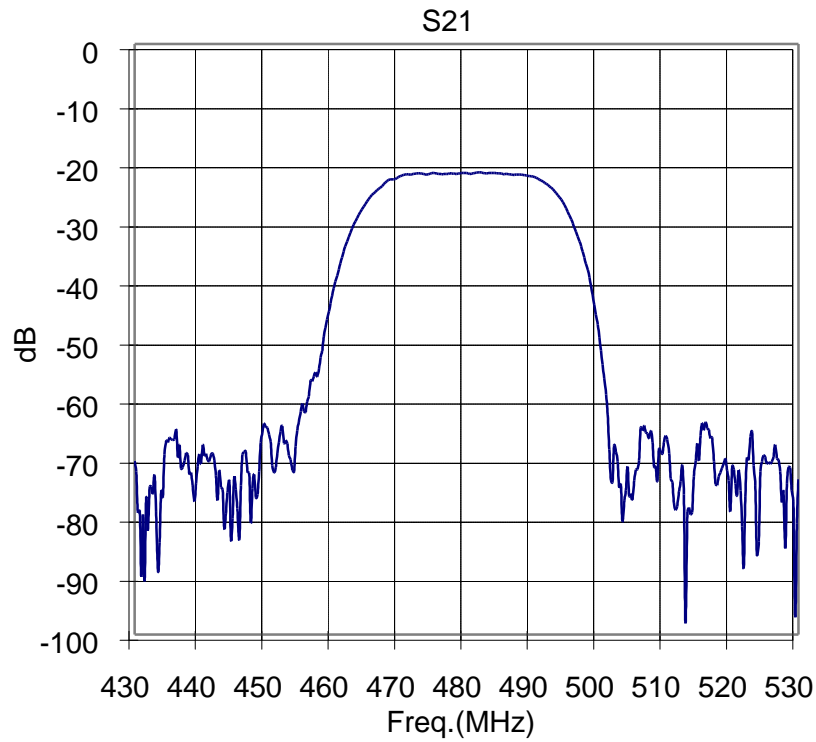

(2) Amplitude ripple & Group Delay:

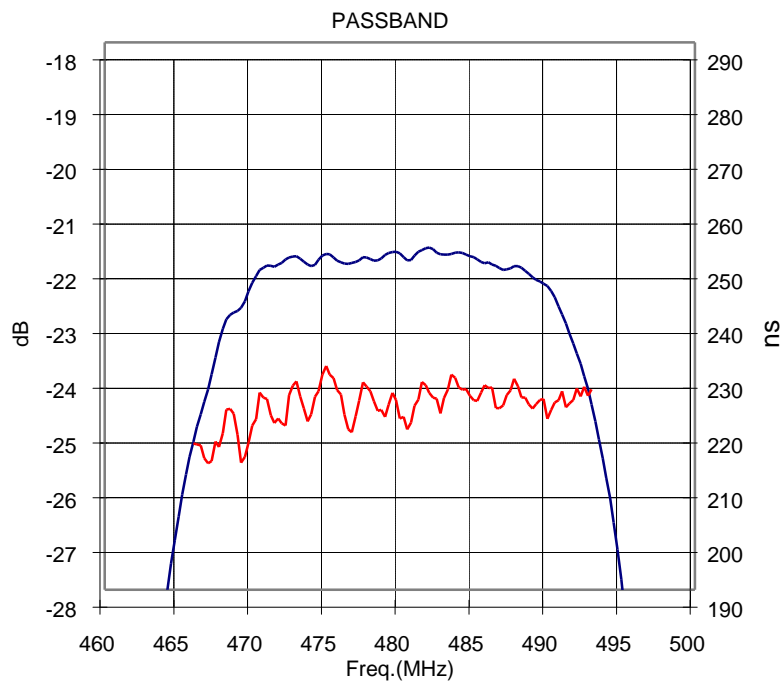


SAW Filter 479.50MHz (Two channel)
Part No: MA07470


Model: TE0103A
REV. NO.: 1

E. FREQUENCY CHARACTERISTICS OF CHANNEL 2:

(1) Frequency Response:

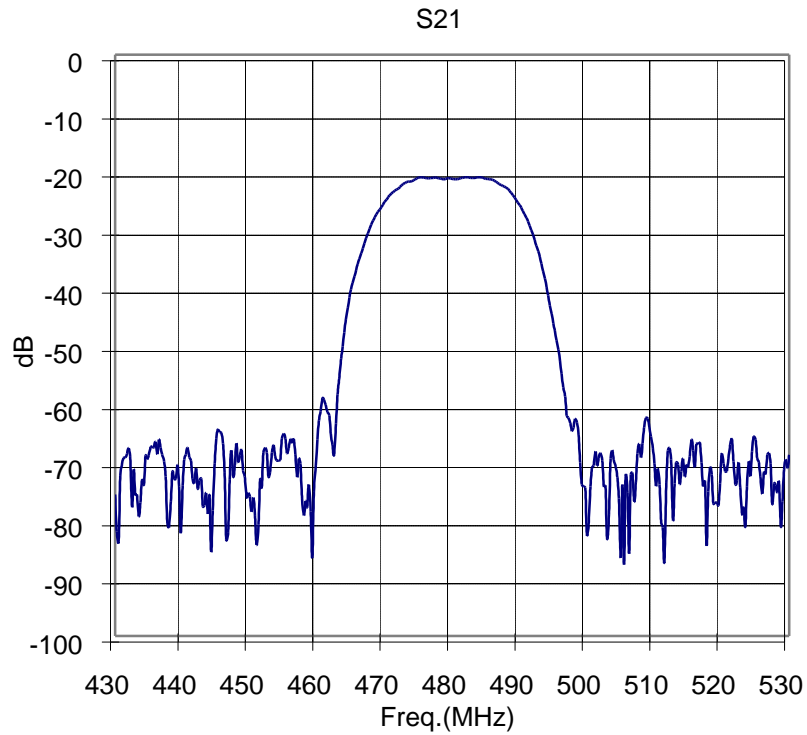

(2) Amplitude ripple & Group Delay:

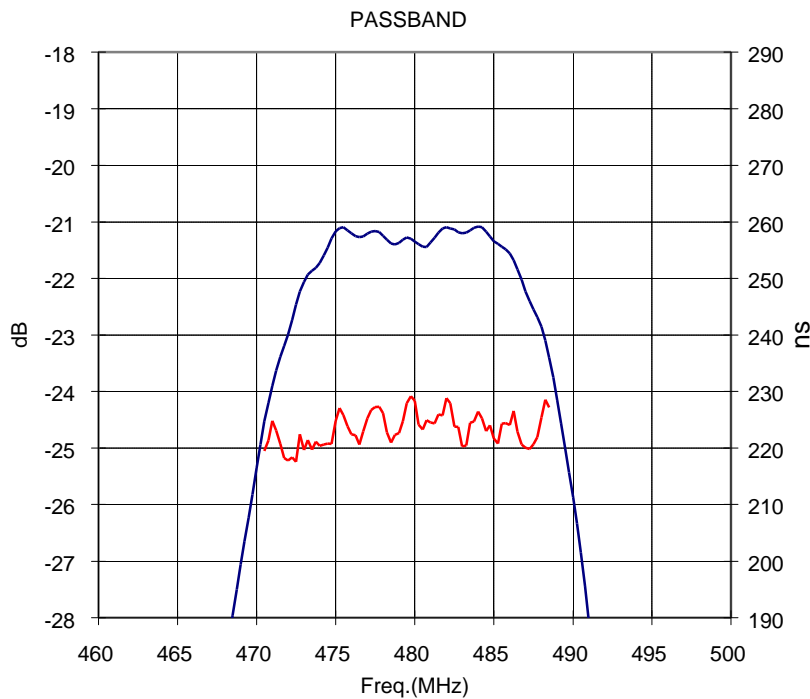


SAW Filter 479.50MHz (Two channel)

Model: TE0103A

Part No: MA07470

REV. NO.: 1

F. MEASUREMENT CIRCUIT:

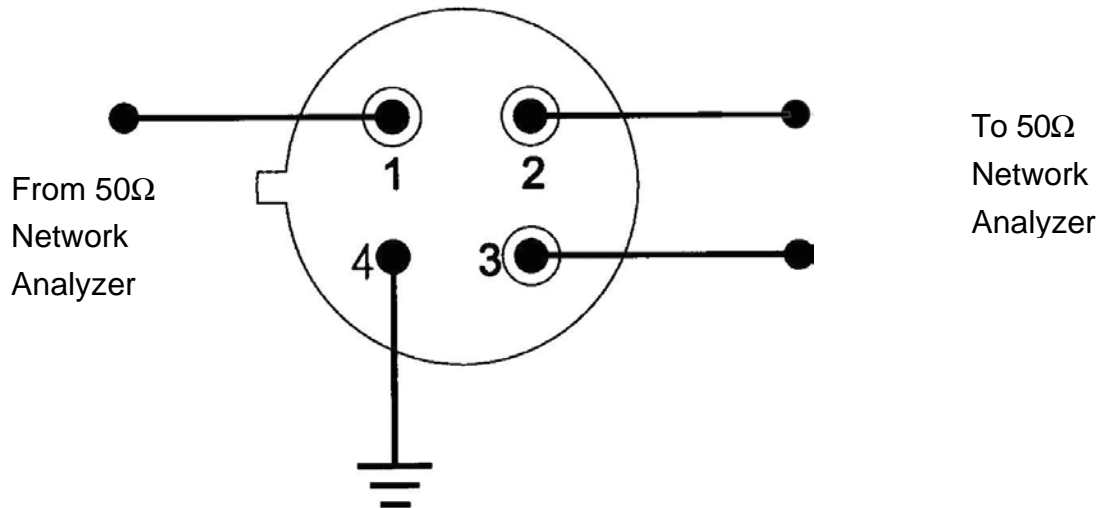

G. OUTLINE DRAWING:

