

SAW Filter 2610.0MHz
Part No: MP02053

Model: TA0760A
Rev No: 3


A. MAXIMUM RATING:

1. Input Power Level: 10dBm
2. DC Voltage: 3V
3. Operating Temperature: -30°C to +85°C
4. Storage Temperature: -40°C to +95°C

B. ELECTRICAL CHARACTERISTICS:

Item	Unit	Min.	Typ.	Max.	Note
Center Frequency Fc	MHz	-	2610	-	-
Insertion Loss (2595 ~ 2625MHz) IL	dB	-	2.9	3.5	-
Amplitude Ripple (2595 ~ 2625MHz)	dB	-	0.8	2.2	-
Return Loss (2595 ~ 2625MHz)	dB	9	21	-	-
Attenuation (Reference level from 0dB)					
2100 ~ 2450MHz	dB	35	44	-	-
2710 ~ 2840MHz	dB	40	52	-	-
2840 ~ 3000MHz	dB	35	48	-	-


C. MEASUREMENT CIRCUIT:

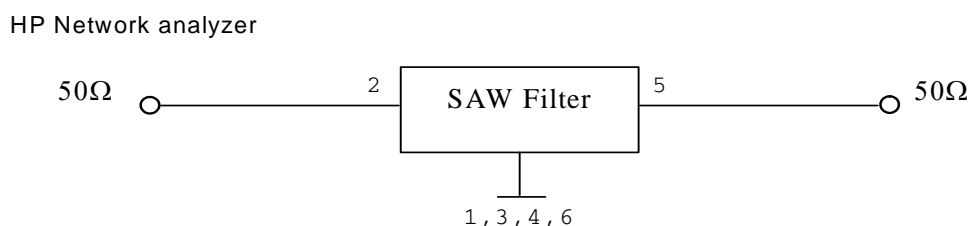


SAW Filter 2610.0MHz
Part No: MP02053

Model: TA0760A
Rev No: 3

D. OUTLINE DRAWING:

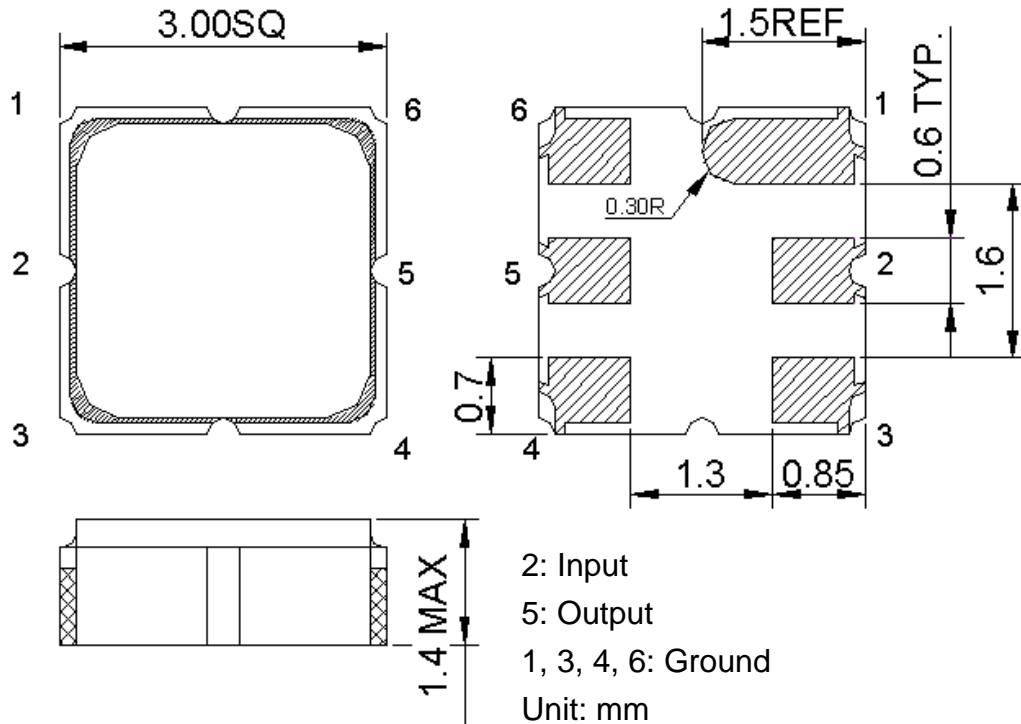



E. PCB FOOTPRINT:

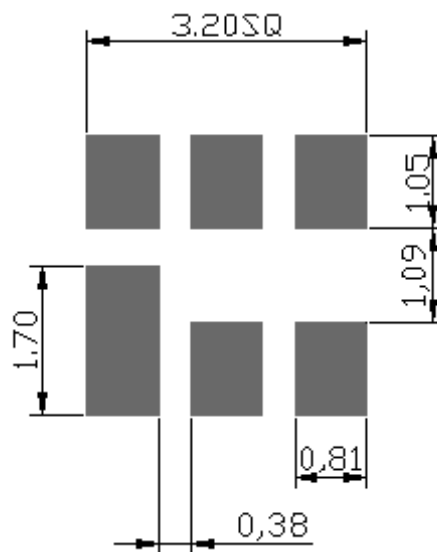

SAW Filter 2610.0MHz
Part No: MP02053

Model: TA0760A
Rev No: 3

F. FREQUENCY CHARACTERISTICS:

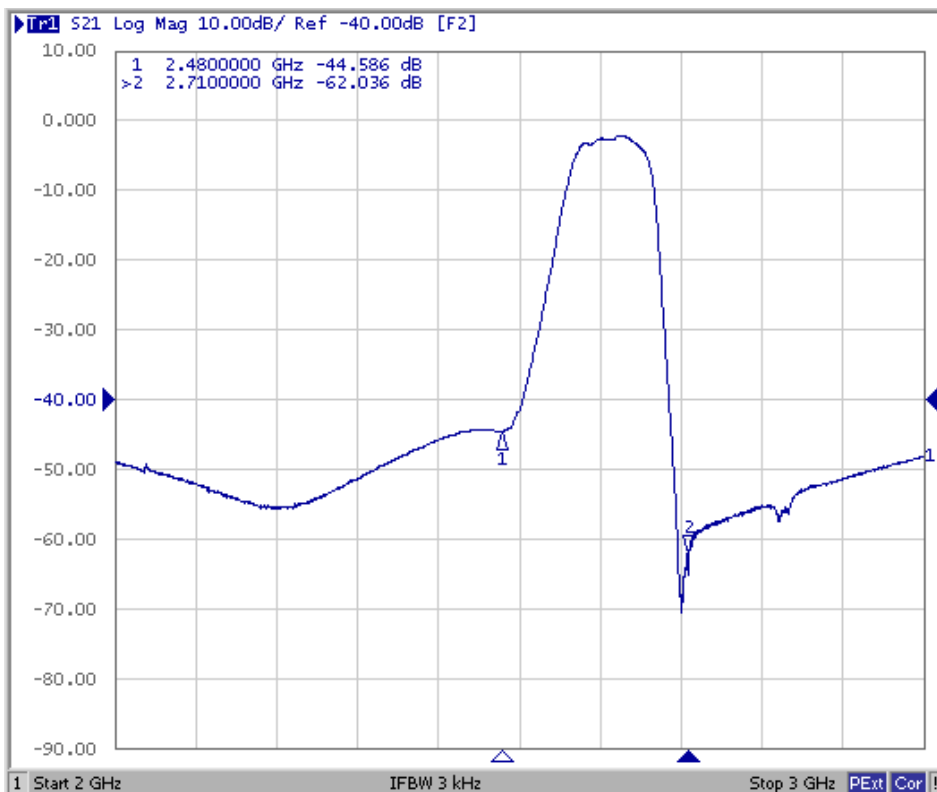
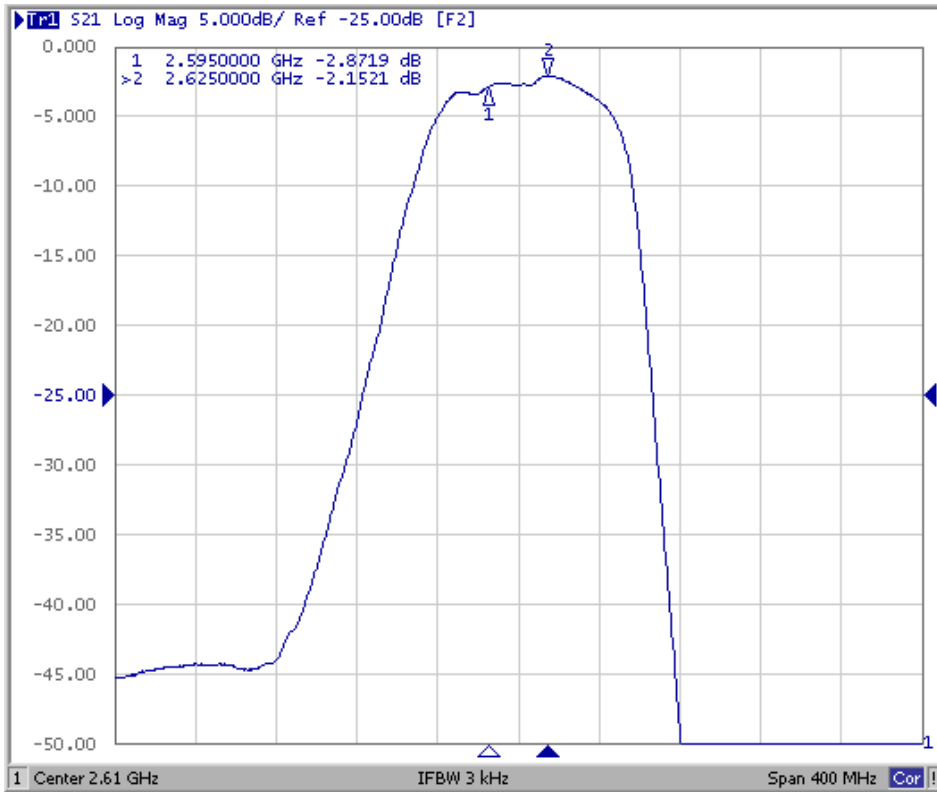


SAW Filter 2610.0MHz
Part No: MP02053

Model: TA0760A
Rev No: 3

Reflection Functions



S11

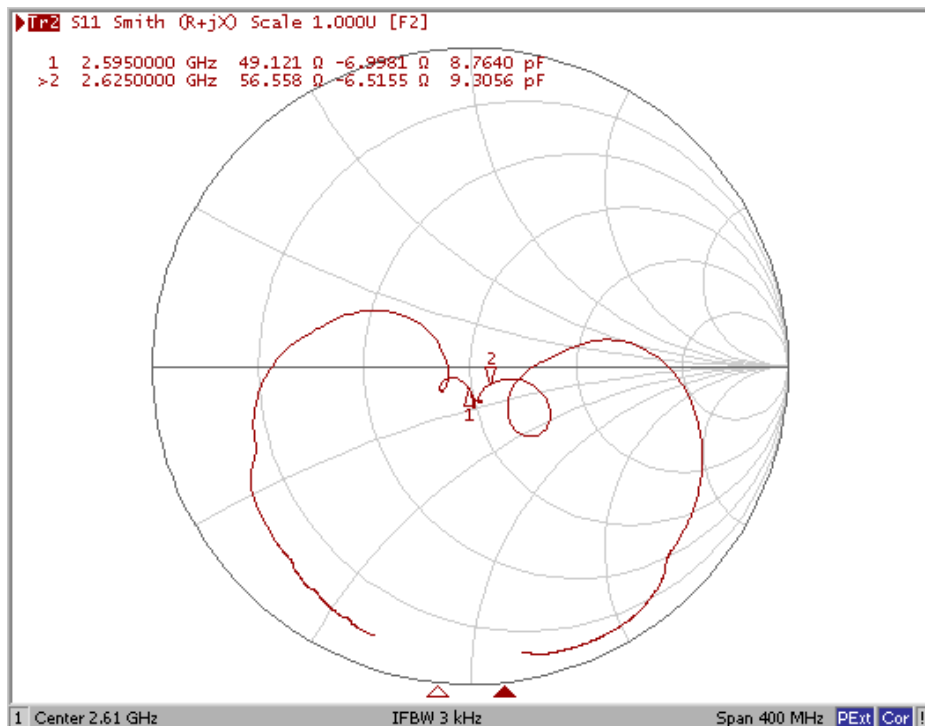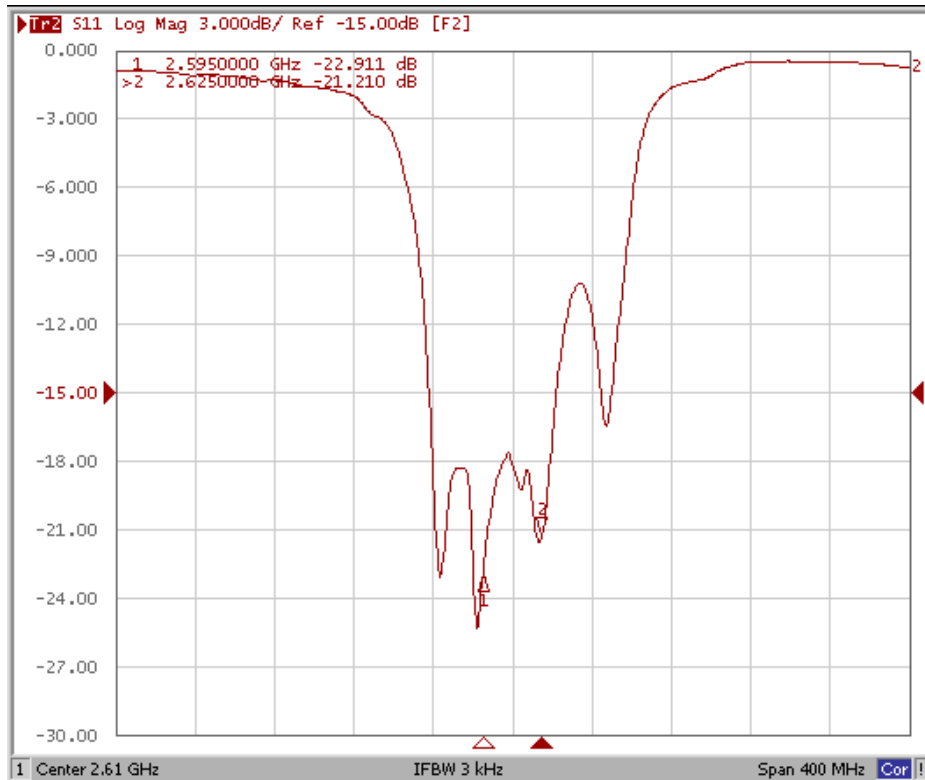

SAW Filter 2610.0MHz
Part No: MP02053

Model: TA0760A
Rev No: 3

S22

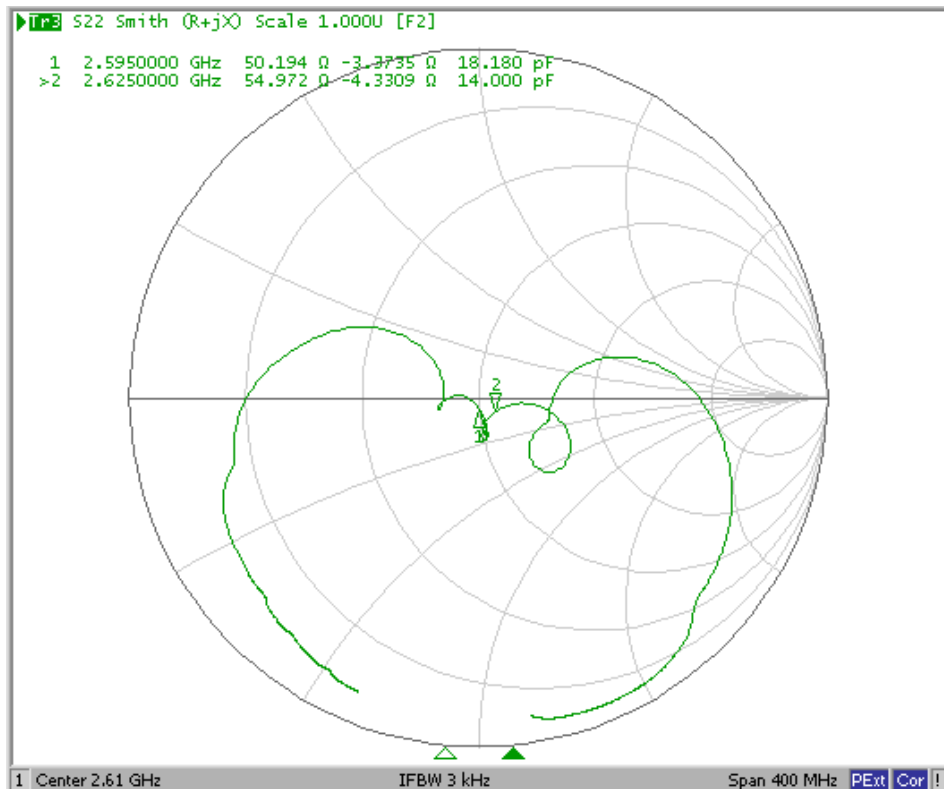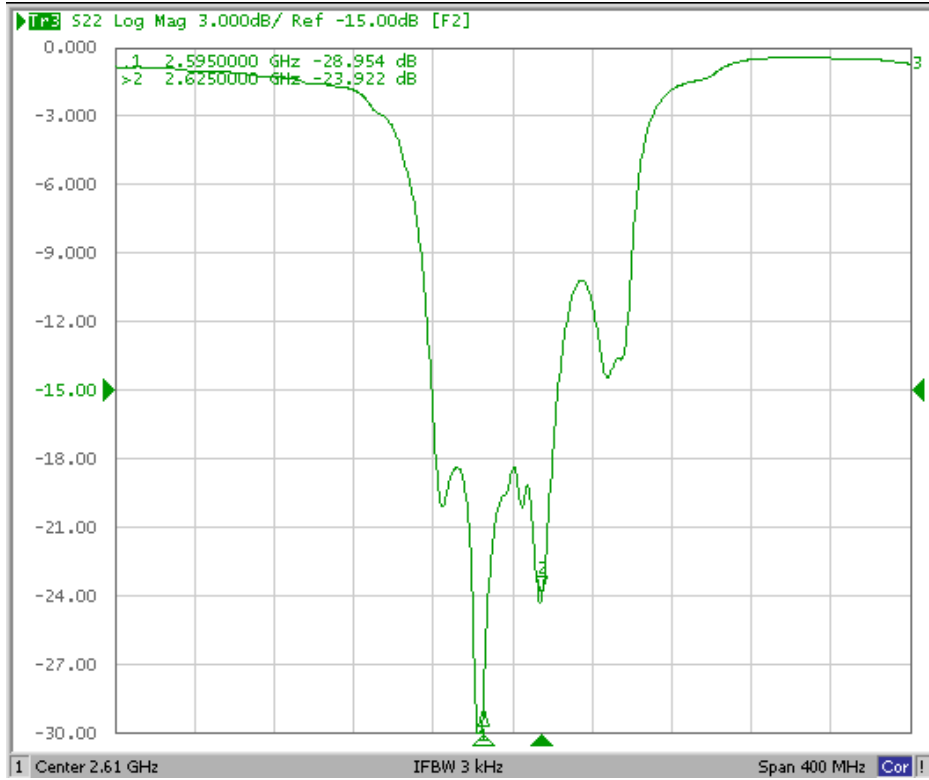


SAW Filter 2610.0MHz
Part No: MP02053


Model: TA0760A
Rev No: 3

G. PACKING:

- 1. Reel Dimension (Reel Count: 7" = 1000; 13" = 3000)

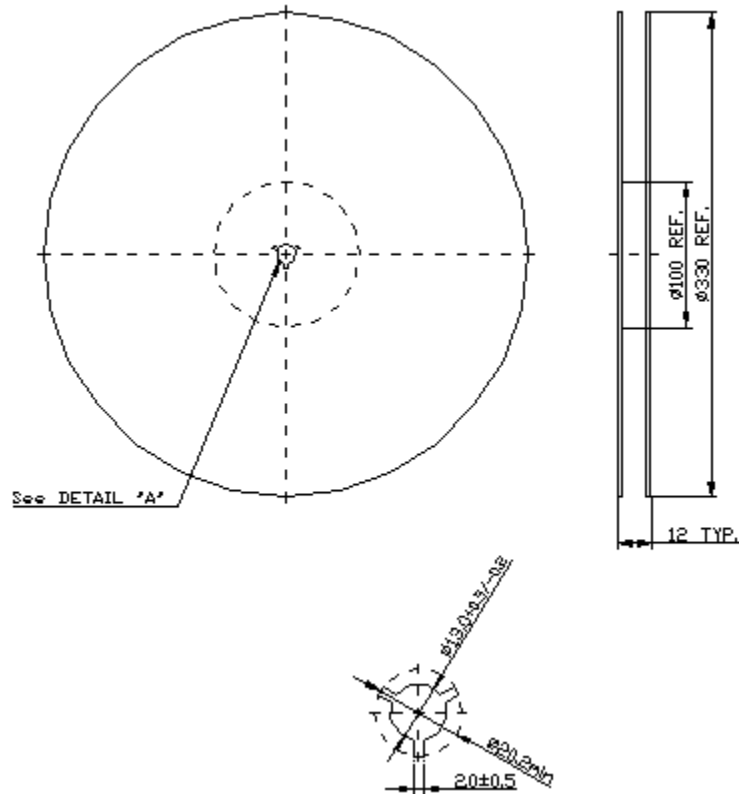

2. Tape Dimension

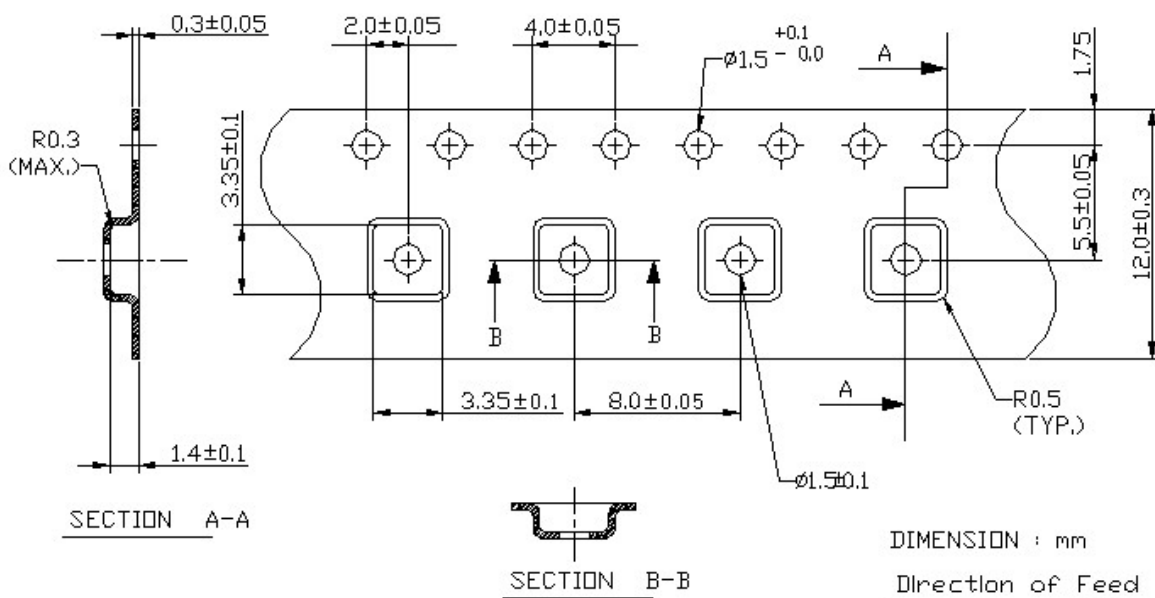

SAW Filter 2610.0MHz
Part No: MP02053

Model: TA0760A
Rev No: 3

H. RECOMMENDED REFLOW PROFILE:

