

SAW Filter 140MHz
Part No: MP03072

Model: TB0440A
Rev No: 1

A. MAXIMUM RATING:


1. Operating Temperature: -5°C ~ +85°C
2. Storage Temperature: -55°C ~ +80°C
3. Input Power Level: 10dBm

B. CHARACTERISTICS:

Ambient Temperature: 25°C

Characteristics	Value			Note.
	Min.	Typ.	Max.	
Center frequency Fc MHz	-	140.0	-	-
Maximum Insertion loss IL dB	-	9.6	11.0	-
1dB Bandwidth MHz	18.0	23.0	-	-
3dB Bandwidth MHz	22.0	25.0	-	-
40dB Bandwidth MHz	-	33.0	60.0	-
Passband Ripple (Fc ± 9MHz) MHz	-	0.7	1.0	-
Group Delay Ripple (Fc ± 9MHz) nS	-	80	180	-
Temp Coefficient ppm/°C	-	-94	-	-


C. TEST FIXTURE:

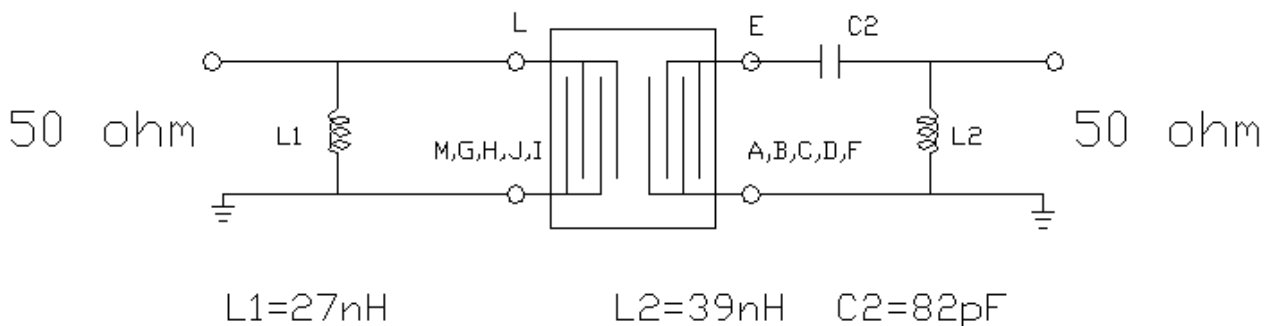

SAW Filter 140MHz
Part No: MP03072


Model: TB0440A
Rev No: 1

D. OUTLINE DRAWING:

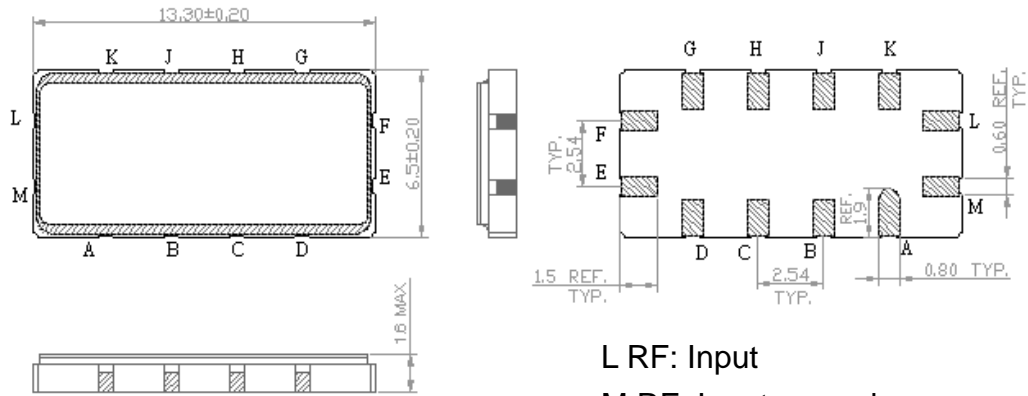

- L RF: Input
 - M RF: Input ground
 - E RF: Output
 - F RF: Output ground
 - A, B, C, D, G, H, J, K: To be ground
- Unit: mm

E. PCB FOOTPRINT:

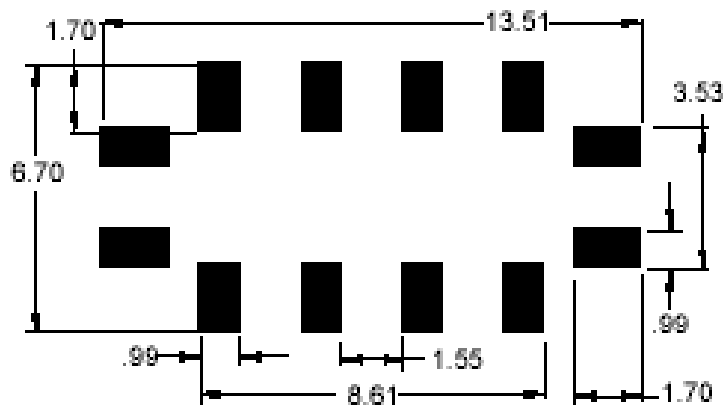

SAW Filter 140MHz
Part No: MP03072

Model: TB0440A
Rev No: 1

F. FREQUENCY CHARACTERISTICS:

1. S21 Response

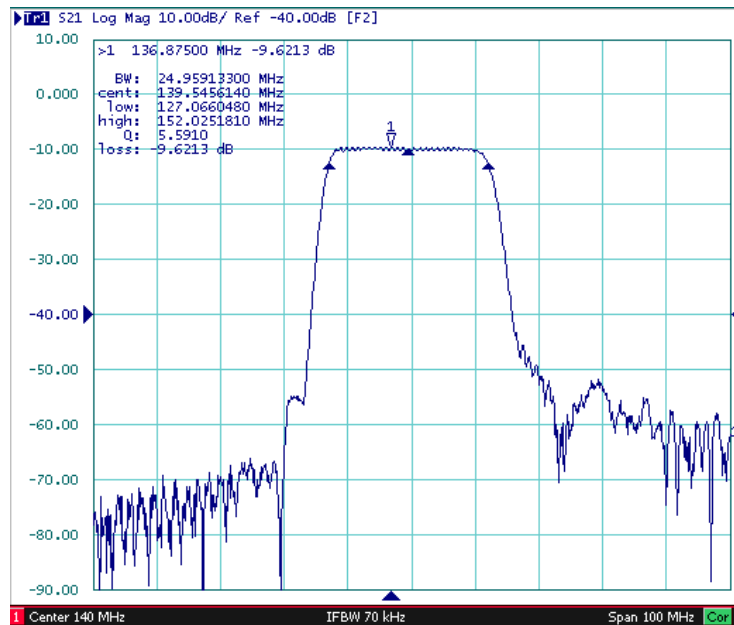


Fig 1: Horizontal: 100MHz/Div Vertical: 10dB/Div

2. Pass band Ripple and Group Delay Ripple

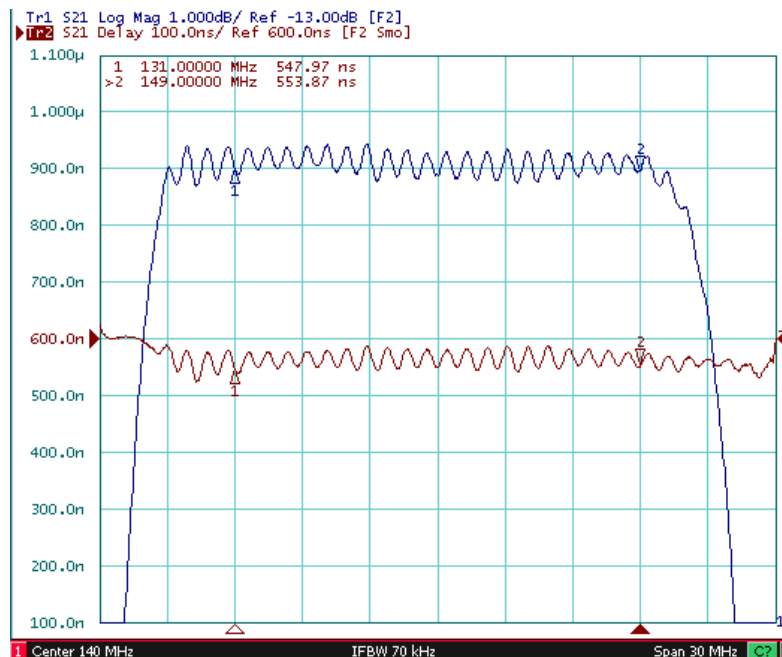



Fig 2: Horizontal: 3MHz/Div Vertical: 1dB/Div Vertical: 100nS/Div

SAW Filter 140MHz
Part No: MP03072

Model: TB0440A
Rev No: 1

G. PACKING:

1. REEL DIMENSION

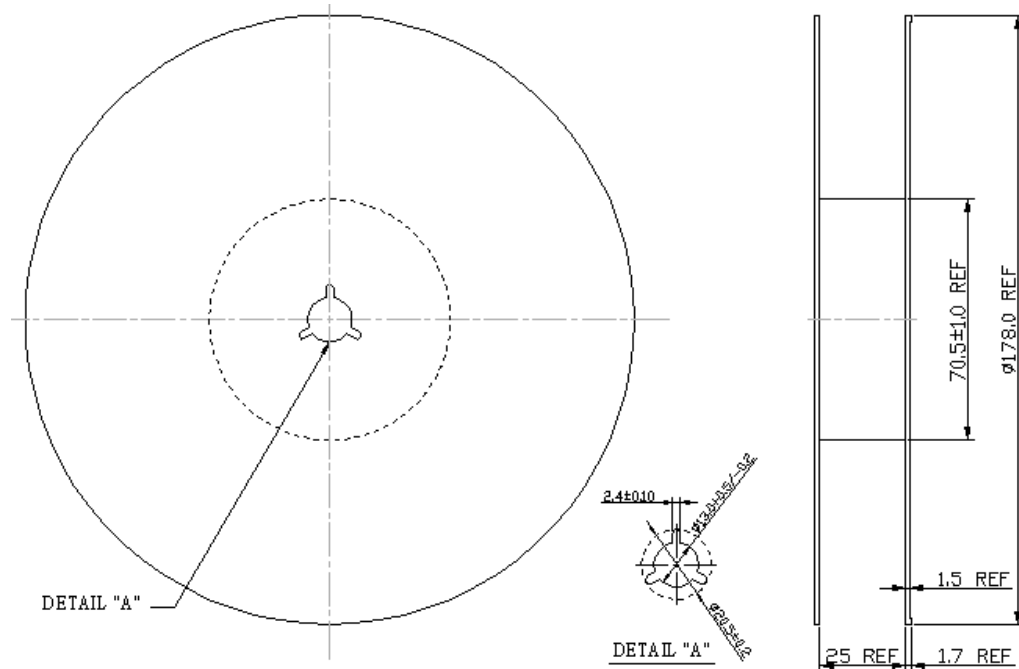

2. TAPE DIMENSION

