

SAW Filter 999.0MHz
Part No: MP03791

Model: TA1411A
Rev No: 1

A. MAXIMUM RATING:

Electrostatic Sensitive Device (ESD)

1. Input Power Level: 10dBm
2. DC Voltage: 3V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -40°C to +85°C

B. ELECTRICAL CHARACTERISTICS:


1. Terminating source impedance (single ended): $Z_S = 50\Omega$
2. Terminating load impedance (single ended): $Z_L = 50\Omega$

Item	Unit	Min.	Typ.	Max.	Note
Center Frequency F_c	MHz	-	999	-	-
Insertion Loss (988 ~ 1010MHz)	dB	-	2.4	3.5	-
Amplitude Variation (988 ~ 1010MHz)	dB	-	1.35	2.4	-
Amplitude Variation over 3MHz	dB	-	0.7	1.2	-
VSWR (988 ~ 1010MHz)		-	1.9	2.4	-
Group Delay Variation over 3MHz	ns	-	15	23	-
Attenuation (reference level from 0dB)					
DC ~ 970MHz	dB	30	36	-	-
970 ~ 974MHz	dB	15	30	-	-
1024 ~ 1028MHz	dB	15	45	-	-
1028 ~ 2000MHz	dB	30	38	-	-
Temperature Coefficient of Frequency	ppm/C	-	-36	-	-

SAW Filter 999.0MHz
Part No: MP03791


Model: TA1411A
Rev No: 1

C. OUTLINE DRAWING:

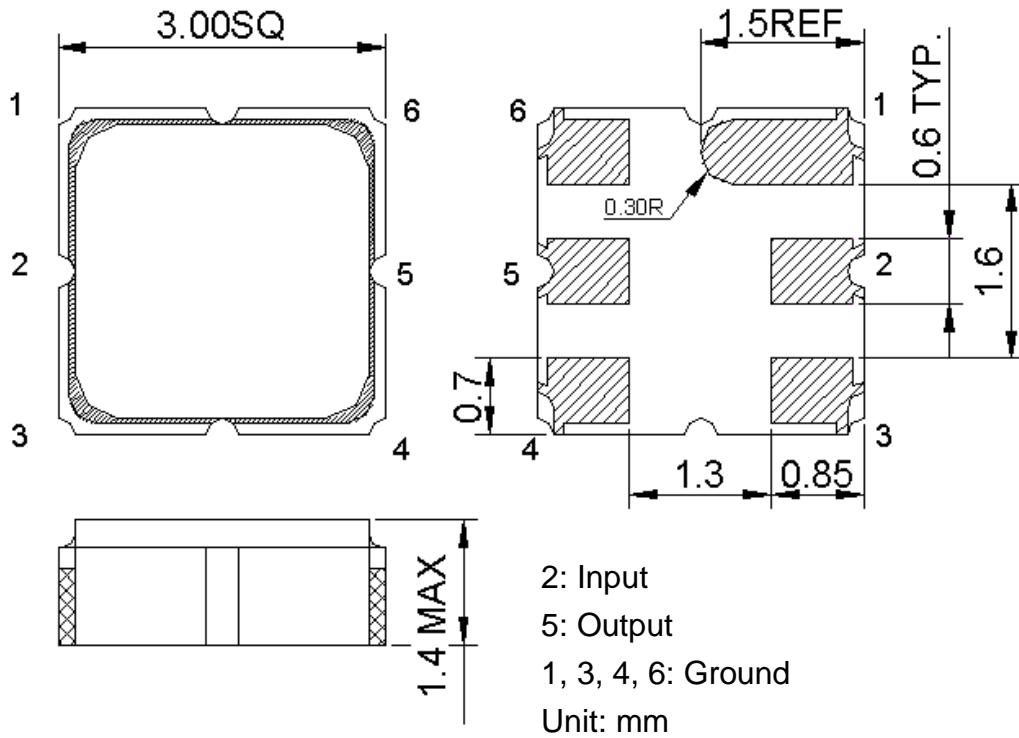


D. MEASUREMENT CIRCUIT:

HP Network analyzer

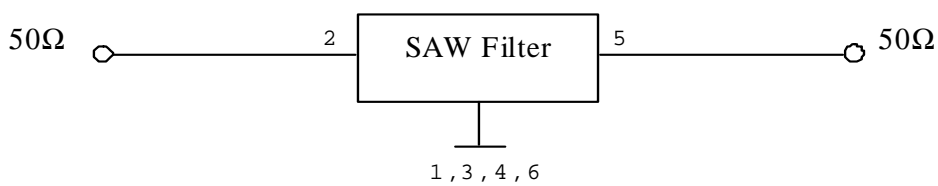




E. PCB FOOTPRINT:

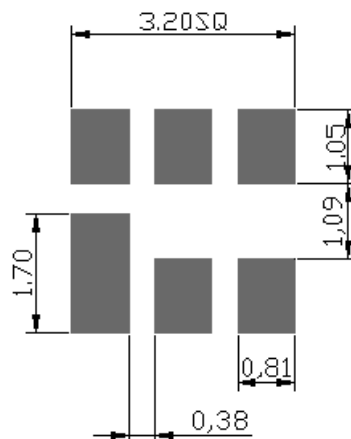

SAW Filter 999.0MHz
Part No: MP03791

Model: TA1411A
Rev No: 1

F. FREQUENCY CHARACTERISTICS:

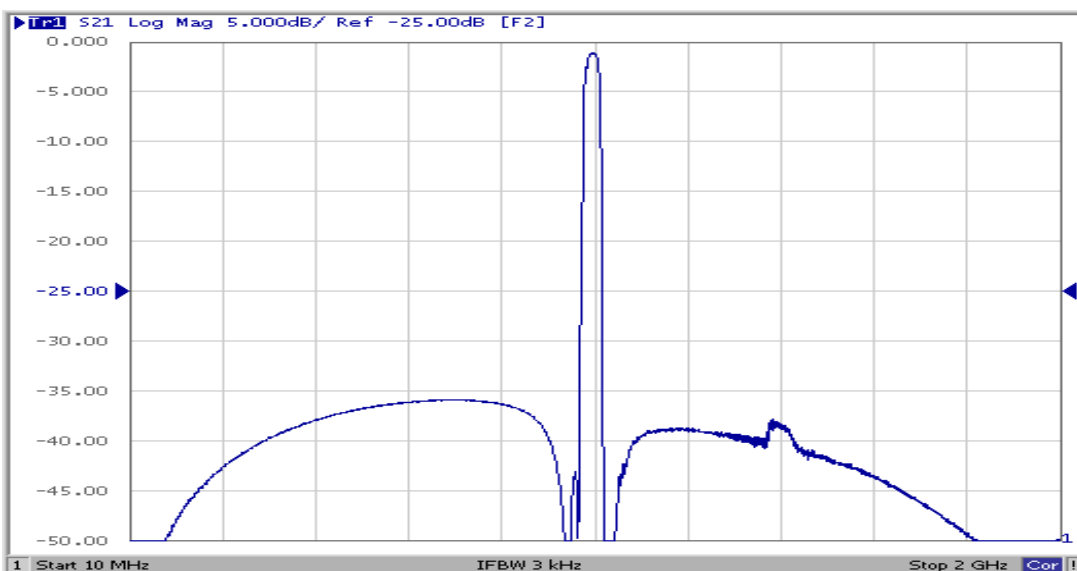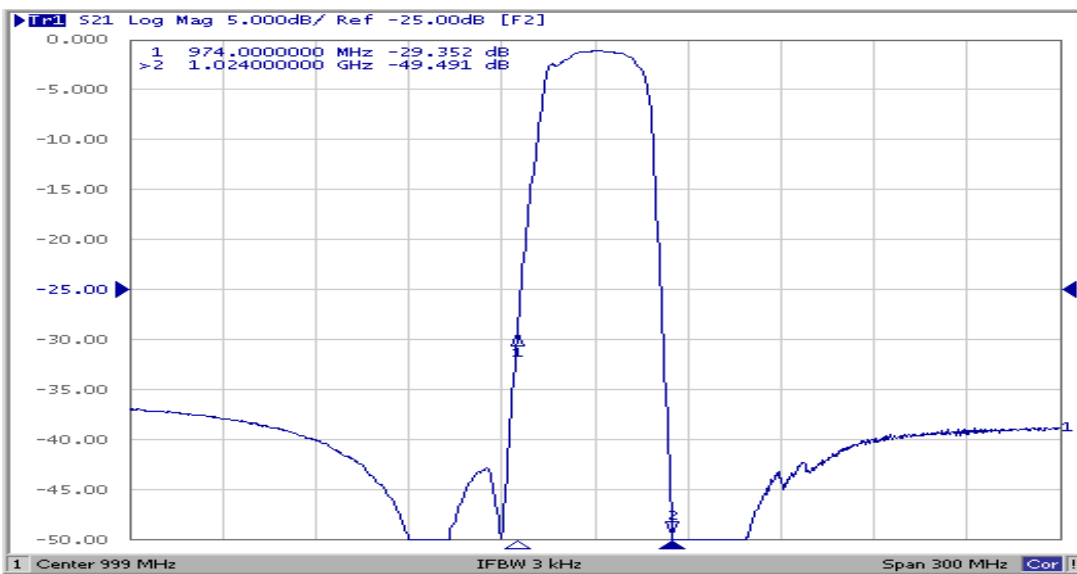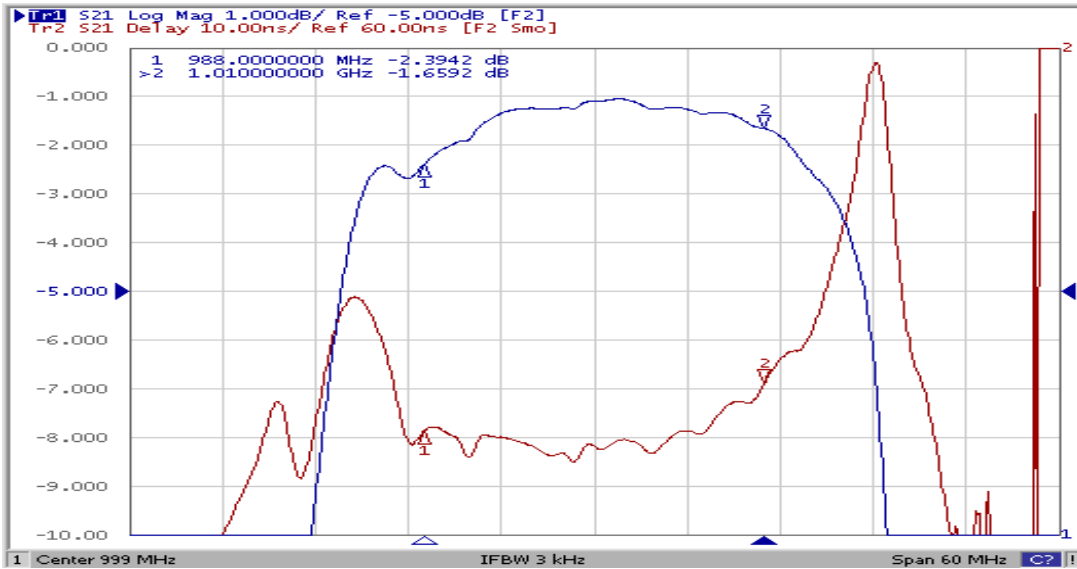


SAW Filter 999.0MHz
Part No: MP03791


Model: TA1411A
Rev No: 1

Reflection Functions

S11

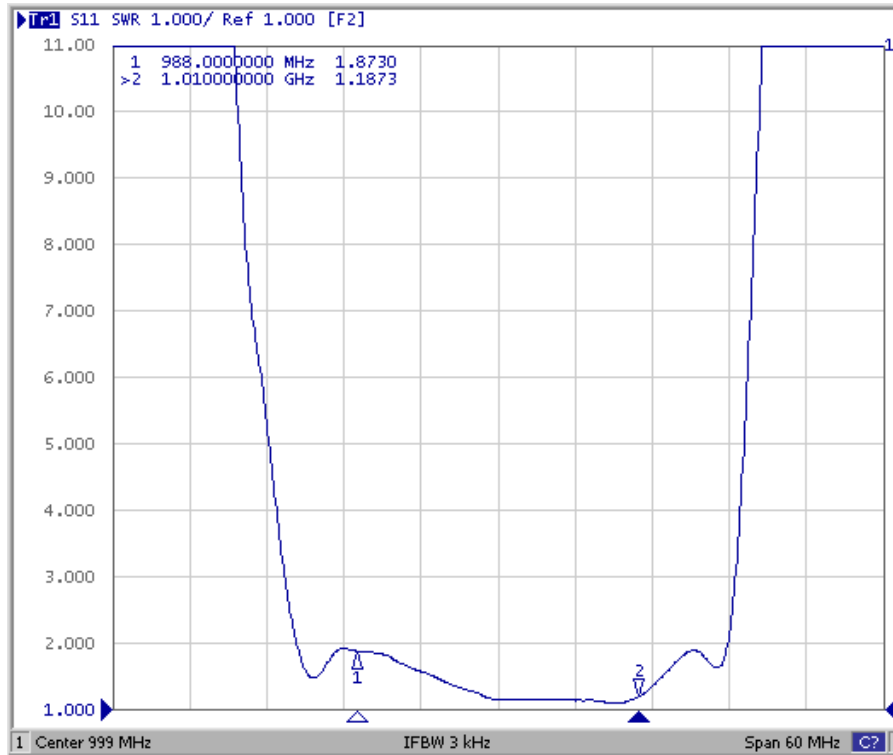

S22

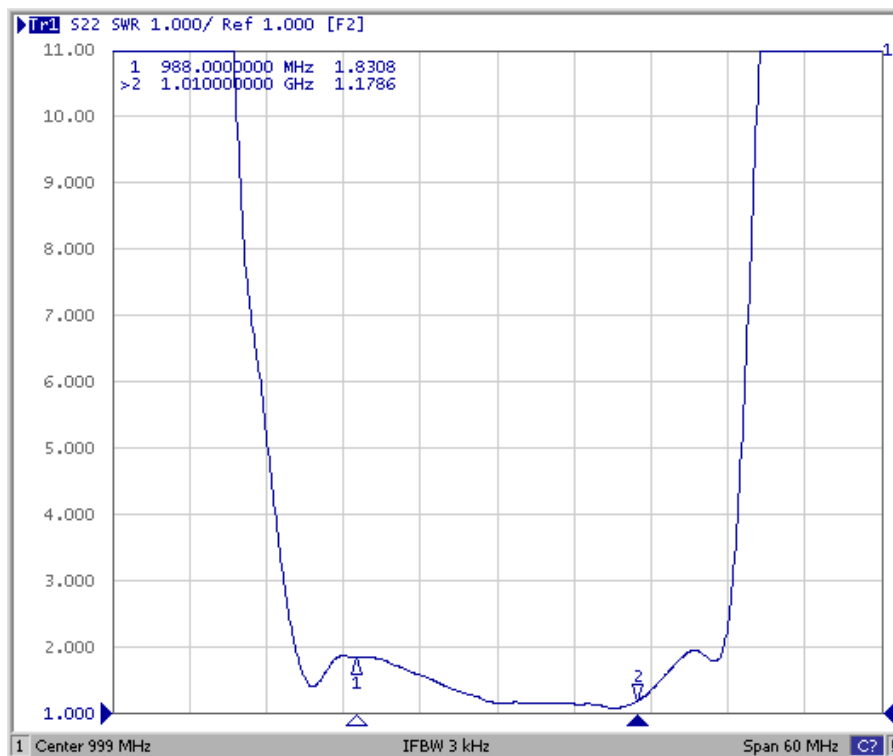


SAW Filter 999.0MHz
Part No: MP03791


Model: TA1411A
Rev No: 1

G. PACKING:

1. Reel Dimension

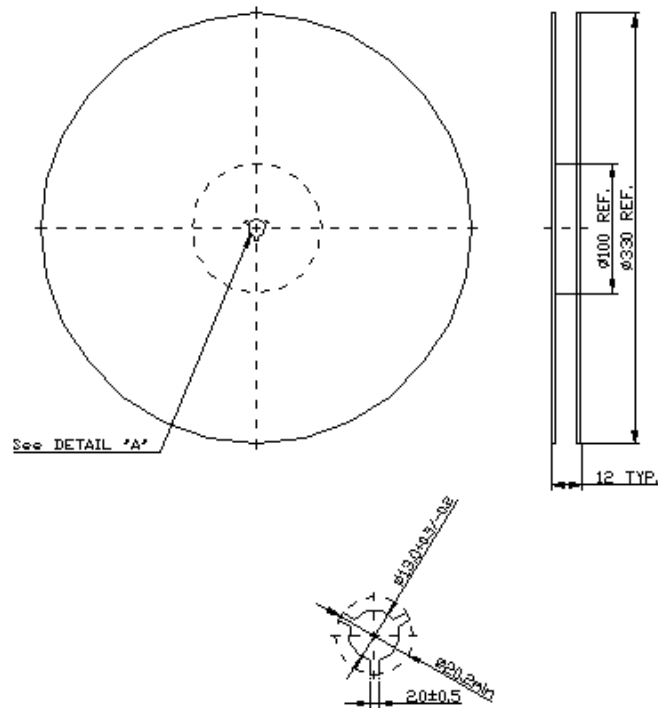

2. Tape Dimension

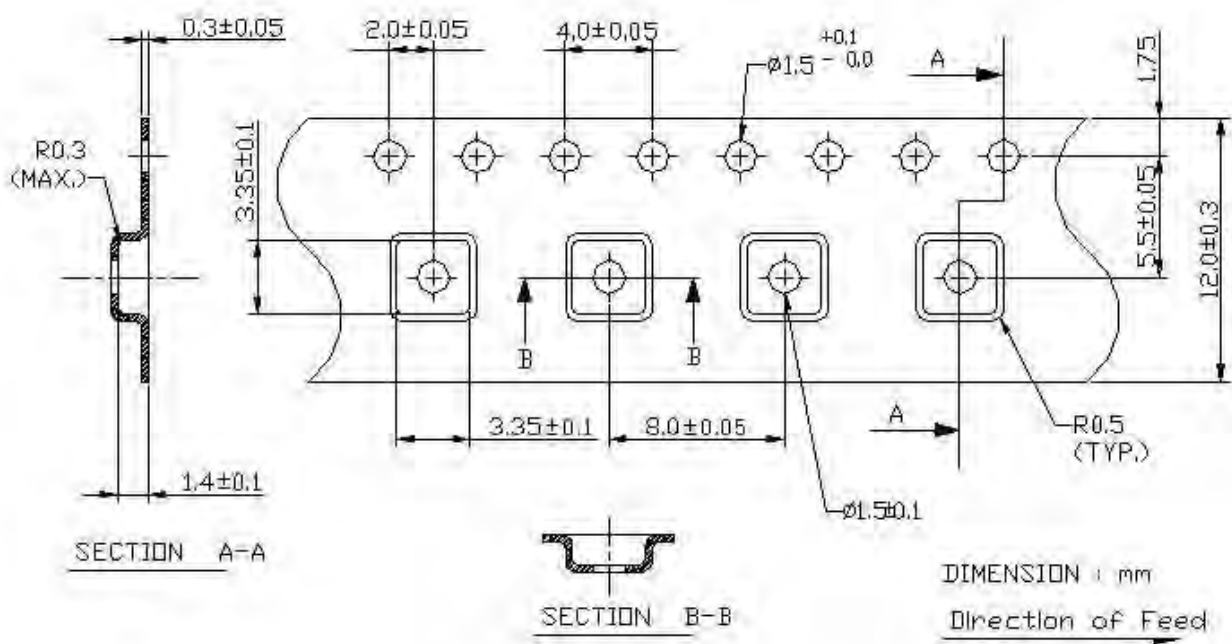

SAW Filter 999.0MHz
Part No: MP03791

Model: TA1411A
Rev No: 1

H. RECOMMENDED REFLOW PROFILE:

1. Preheating shall be fixed at 150 ~ 180°C for 60 ~ 90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50 ~ 80 seconds and at 245 ~ 260°C peak (min 10sec).
4. Time: 2 times.

