

SAW Filter 1725.0MHz
Part No: MP07460

Model: TA1669A
Rev No: 1

A. MAXIMUM RATING:

Electrostatic Sensitive Device (ESD)


1. Input Power Level: 10dBm
2. DC Voltage: 3V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -40°C to +85°C

B. ELECTRICAL CHARACTERISTICS:

Item	Unit	Min.	Typ.	Max.
Center Frequency Fc	MHz	-	1725	-
Insertion loss (1715 ~ 1735MHz) IL	dB	-	1.8	3.0
Amplitude ripple (1715 ~ 1735MHz)	dB	-	0.4	1.8
VSWR (1715 ~ 1735 MHz)	-	-	1.7	2.0
Attenuation (Reference level from 0dB)				
10 ~ 1630MHz	dB	28	35	-
1830 ~ 2500MHz	dB	34	39	-
Temperature coefficient of frequency	ppm/k	-	-36	-

C. MEASUREMENT CIRCUIT:


HP Network analyzer

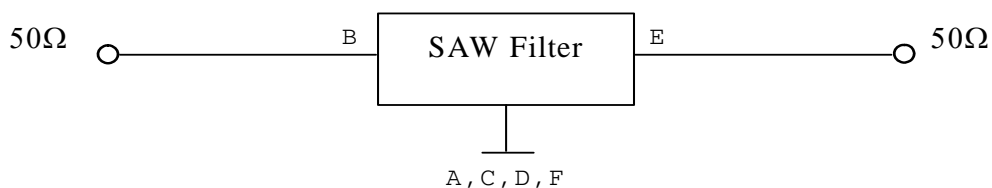

SAW Filter 1725.0MHz
Part No: MP07460


Model: TA1669A
Rev No: 1

D. OUTLINE DRAWING:

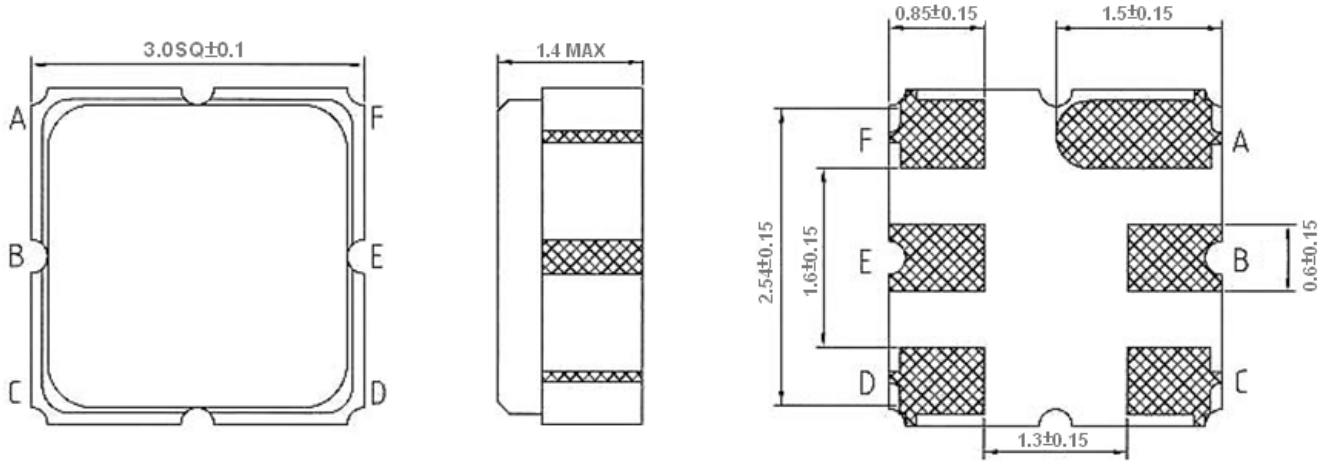

B: Input
 E: Output
 A, C, D, F: Ground
 Unit: mm



E. PCB FOOTPRINT:

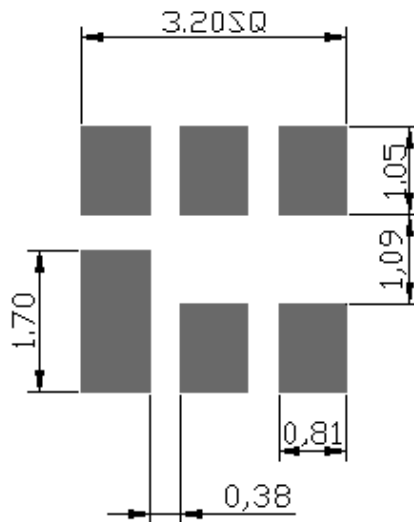

SAW Filter 1725.0MHz
Part No: MP07460

Model: TA1669A
Rev No: 1

F. FREQUENCY CHARACTERISTICS:

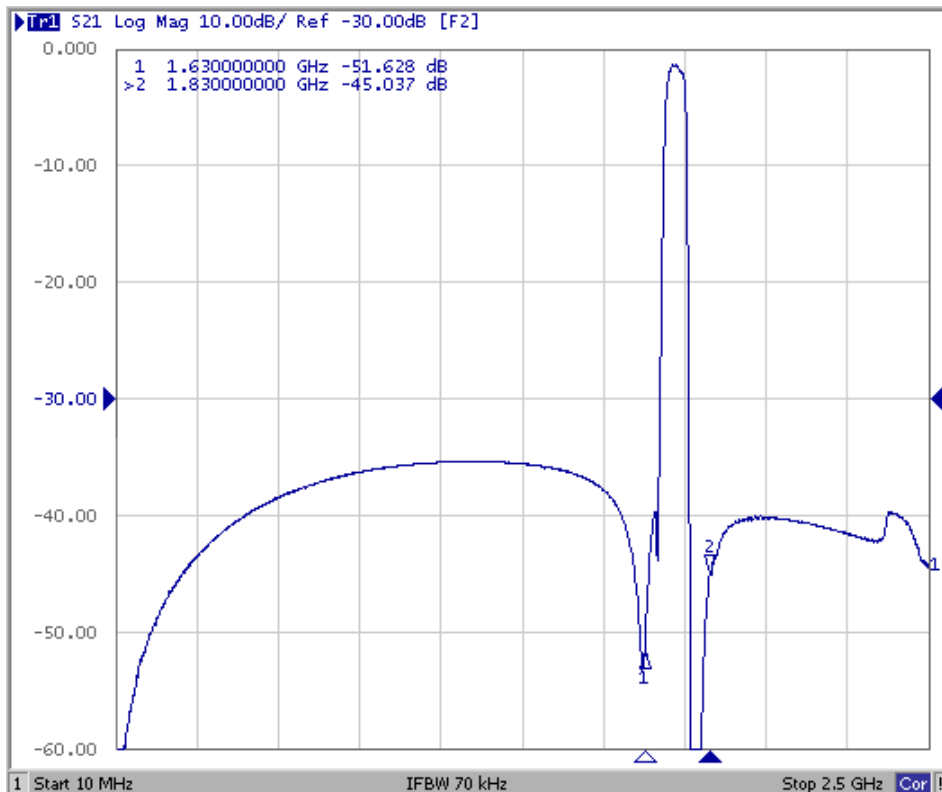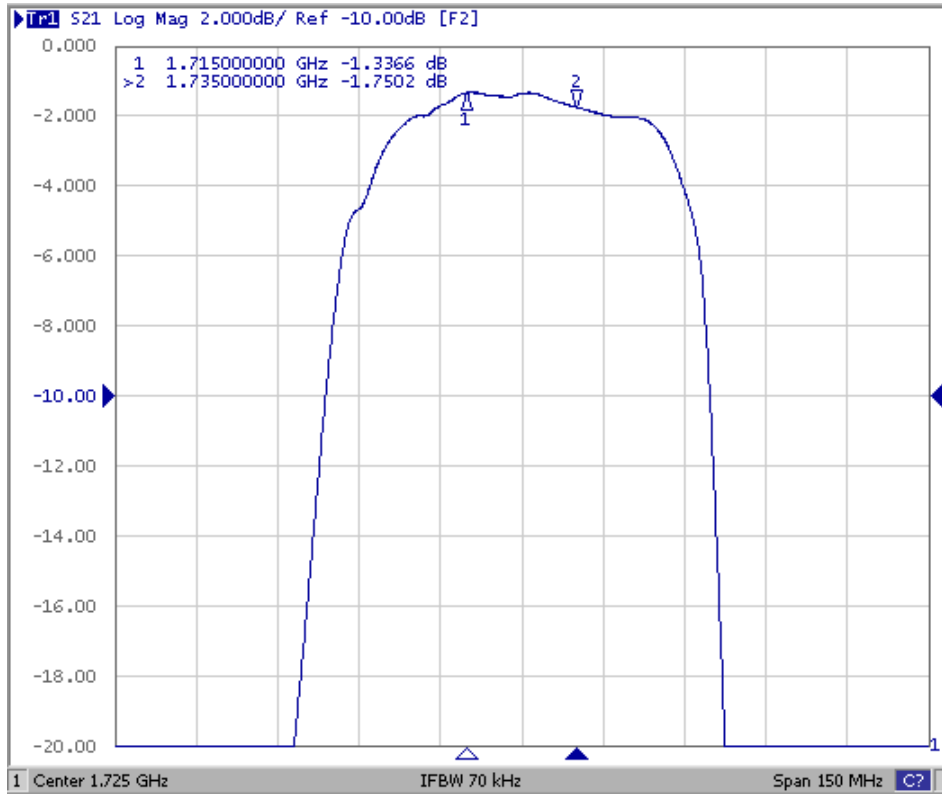


SAW Filter 1725.0MHz
Part No: MP07460


Model: TA1669A
Rev No: 1

Reflection Functions

S11

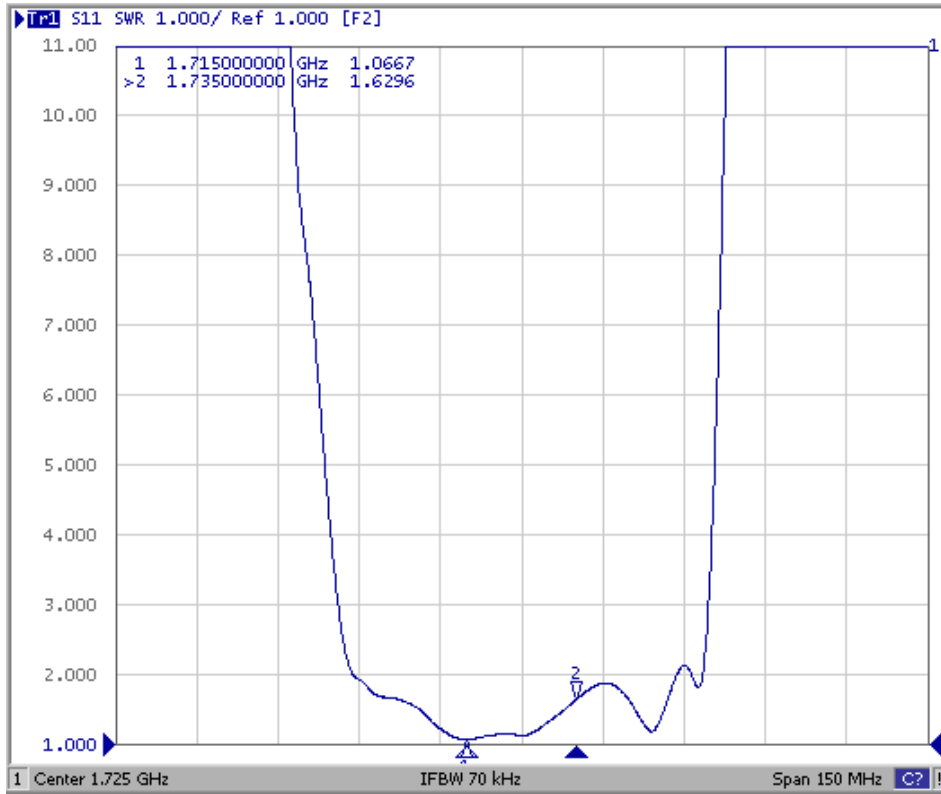

S22

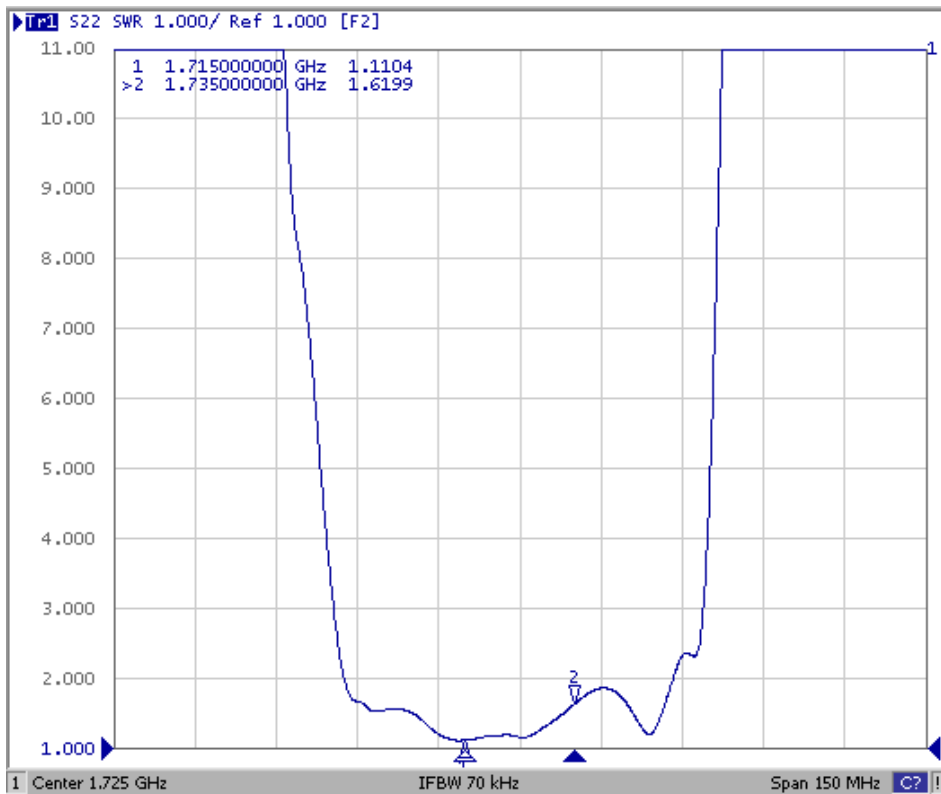

SAW Filter 1725.0MHz
Part No: MP07460

Model: TA1669A
Rev No: 1

H. RECOMMENDED REFLOW PROFILE:

