

SAW Filter 2310.0MHz
Part No: MP06859

Model: TA1786A
Rev No: 1

A. MAXIMUM RATING:

Electrostatic Sensitive Device (ESD)


1. Input Power Level: 13dBm
2. DC voltage: 5V
3. Operating Temperature: -30°C to +85°C
4. Storage Temperature: -40°C to +85°C

B. ELECTRICAL CHARACTERISTICS:

Item	Unit	Min.	Typ.	Max.
Center frequency Fc	MHz	-	2310	-
Insertion Loss (2305 ~ 2315MHz) IL	dB	-	3.6	3.9
Amplitude Ripple (2305 ~ 2315MHz)	dB	-	0.5	1.5
VSWR (2305 ~ 2315MHz)	ns	-	1.4	2.5
Attenuation (Reference level from 0dB)				
1928 ~ 1933MHz	dB	42	49	-
2095 ~ 2110MHz	dB	35	50	-
2350 ~ 2360MHz	dB	25	47	-
2620 ~ 3600MHz	dB	27	43	-
Temperature coefficient of frequency	ppm/k	-	-36	-

C. MEASUREMENT CIRCUIT:



HP Network analyzer

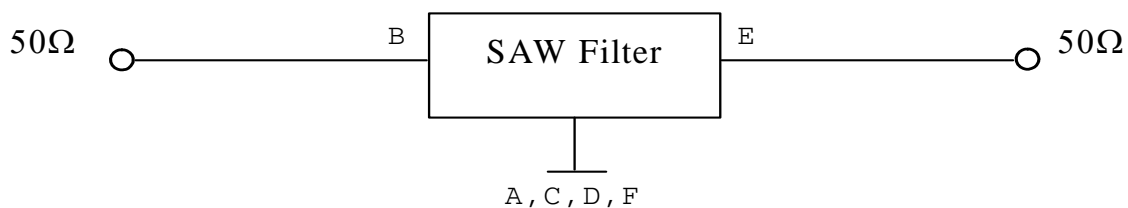

SAW Filter 2310.0MHz
Part No: MP06859

Model: TA1786A
Rev No: 1

D. FREQUENCY CHARACTERISTICS:

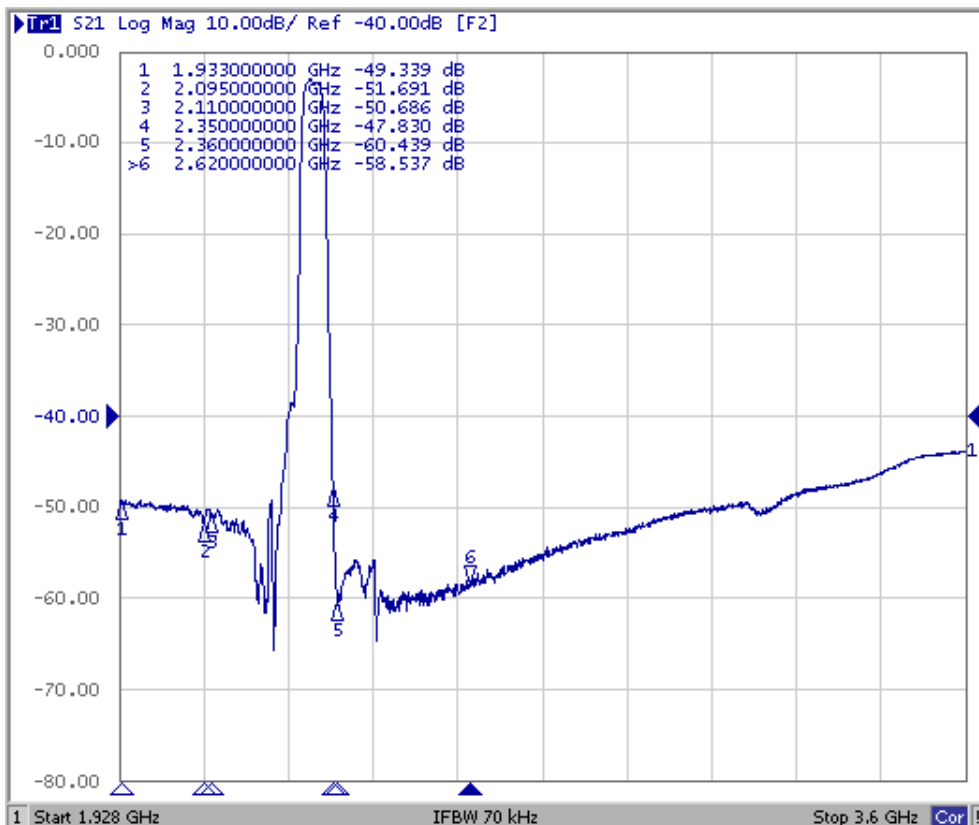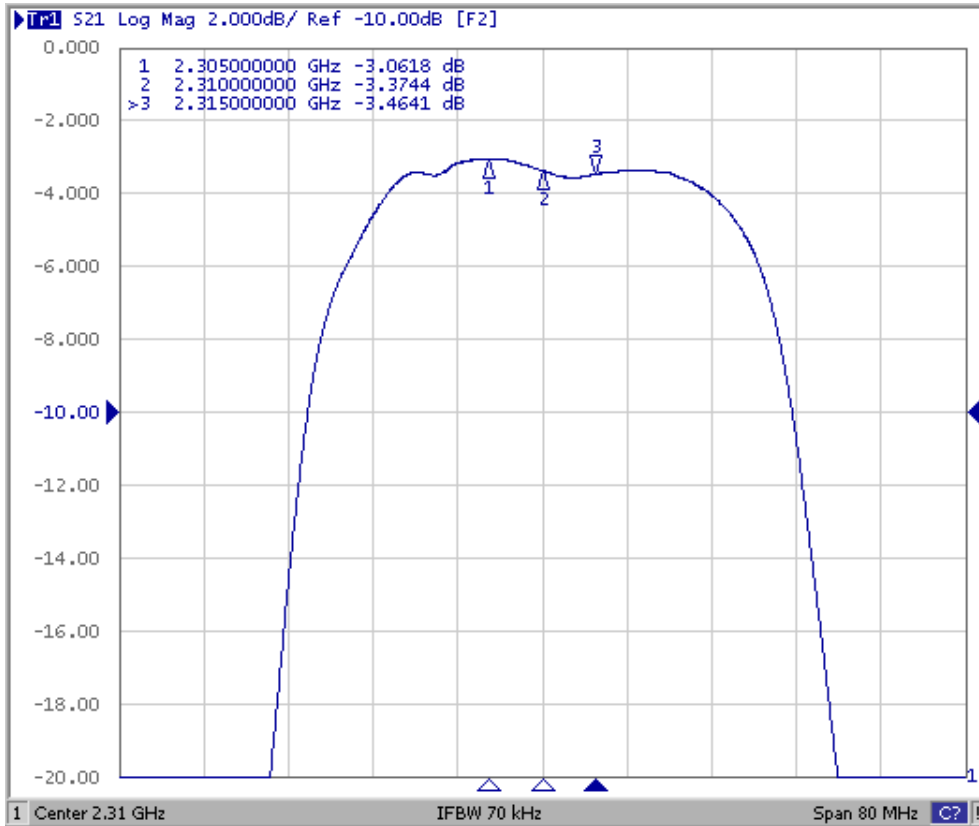


SAW Filter 2310.0MHz
Part No: MP06859


Model: TA1786A
Rev No: 1

Reflection Functions

S11

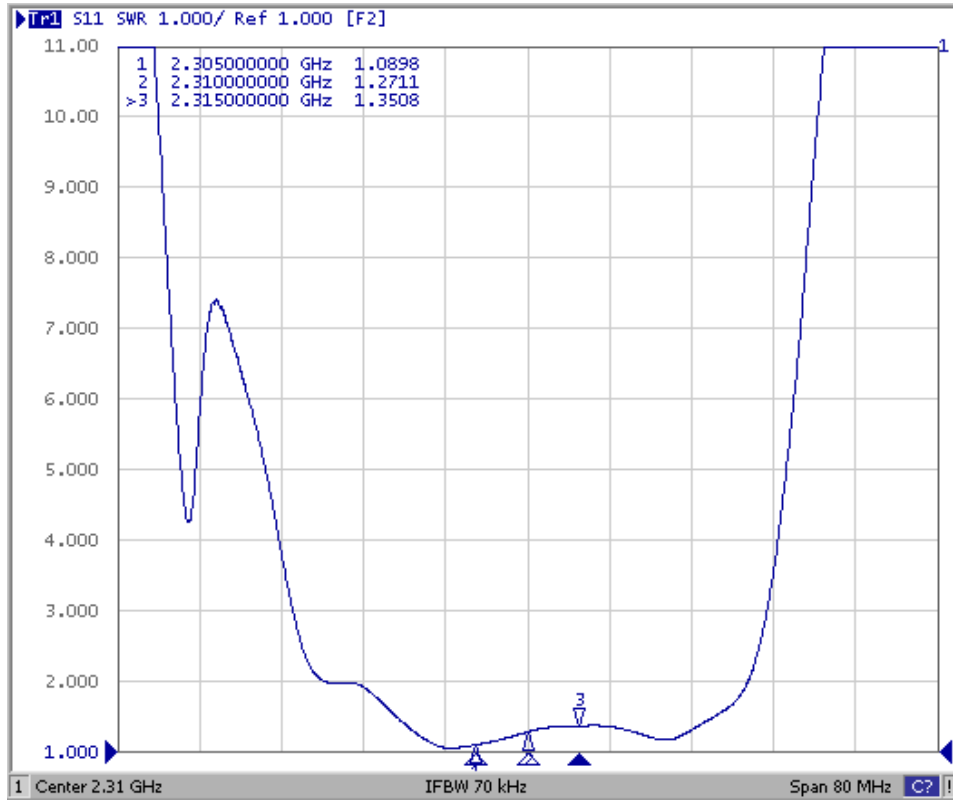


S22

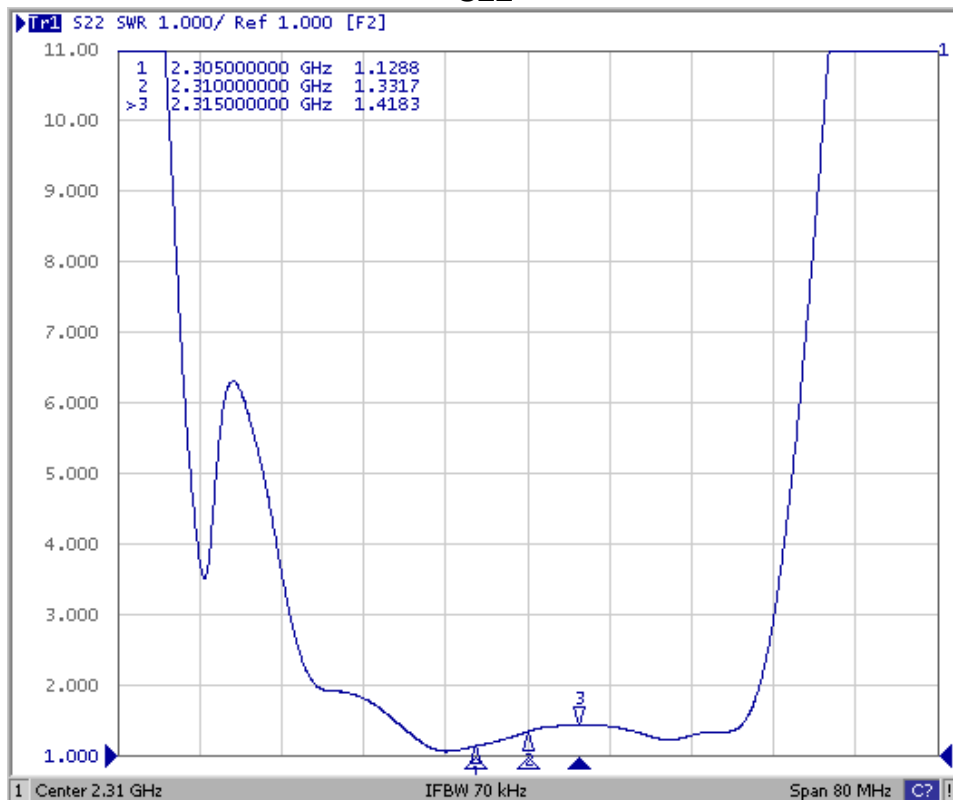

SAW Filter 2310.0MHz
Part No: MP06859


Model: TA1786A
Rev No: 1

E. OUTLINE DRAWING:

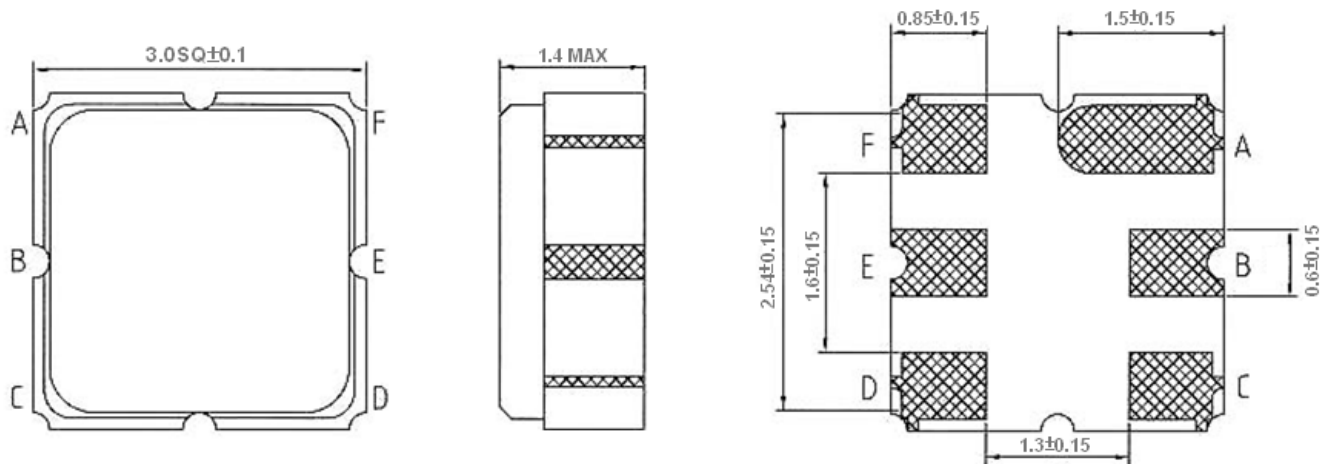

B: Input
E: Output
A, C, D, F: Ground
Unit: mm

F. PCB FOOTPRINT:

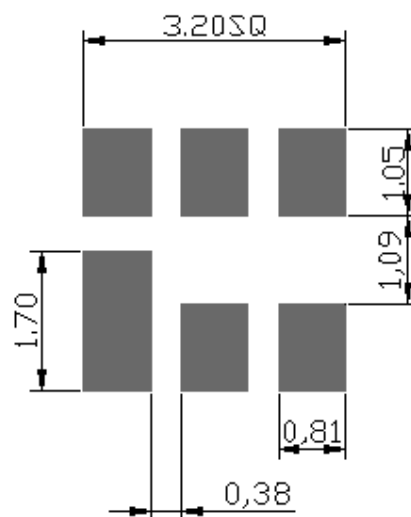


SAW Filter 2310.0MHz
Part No: MP06859


Model: TA1786A
Rev No: 1

G. PACKING:

1. Reel Dimension (Please refer to FR-75D10 for packing quantity)

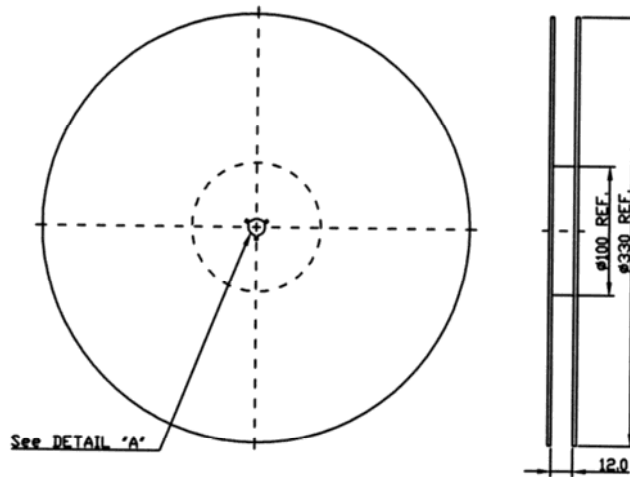

2. Tape Dimension

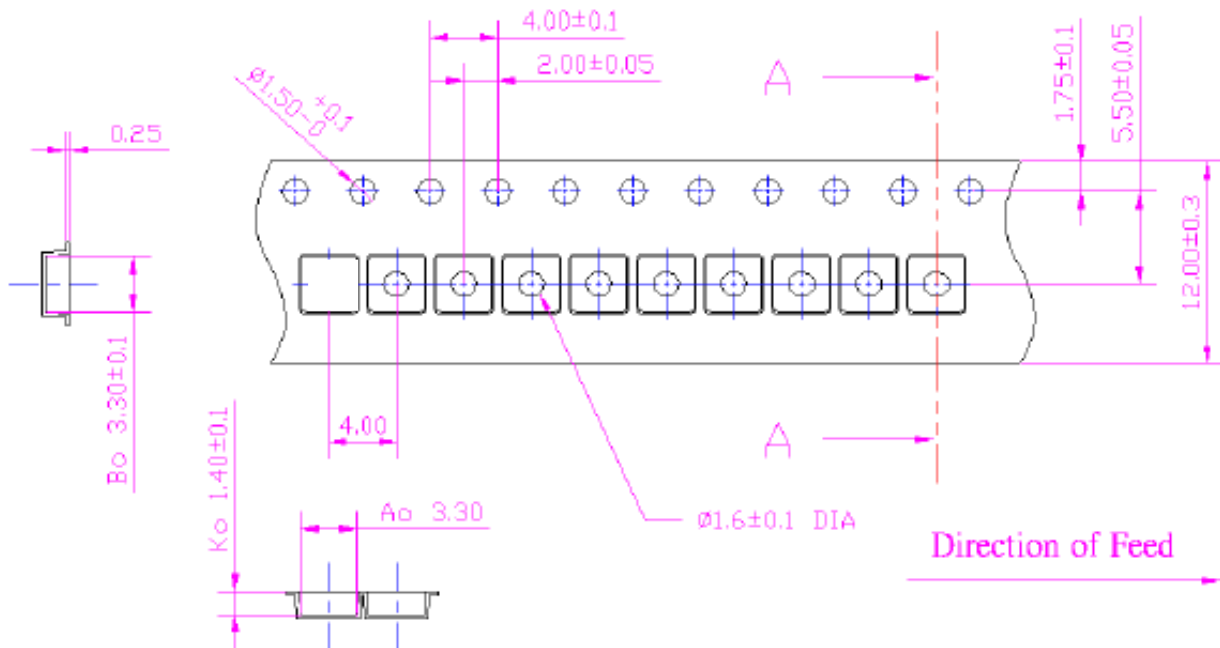

SAW Filter 2310.0MHz
Part No: MP06859

Model: TA1786A
Rev No: 1

H. RECOMMENDED REFLOW PROFILE:

