

## **GMCF-21 21G12A**

# 21.4MHz 2 pole crystal filter with 12.0kHz 3dB bandwidth

- Comprehensive stocks
- Custom specifications available




CONFIGURABLE OPTIONS		
Parameter	Option Code	
Package		
Any		
UM-1/3L (leaded)		
UM-5/3L (leaded)		
UM-1JN/3L (SMT)		
UM-5JN/3L (SMT)		



#### **SPECIFICATIONS**

### PACKAGE DRAWING

Centre frequency	21.4MHz
Dimensions	Package options available - see Package Drawing
Operating temperature range	-20 to +70°C
Number of poles	2
Pass band	-3dB @ ±6.0kHz min
Attenuation band	-20dB @ ±25.0kHz max
In-band ripple	0.5dB max
Insertion loss	1.5dB max
Guaranteed attenuation	-35dB max +350 ~ +1000kHz -50dB max -200 ~ -1000kHz
Termination	1200Ω // 3.0pF
Package style	UM-1/3L, UM-5/3L (through-hole) UM-1JN/3L, UM-5JN/3L (SMT)

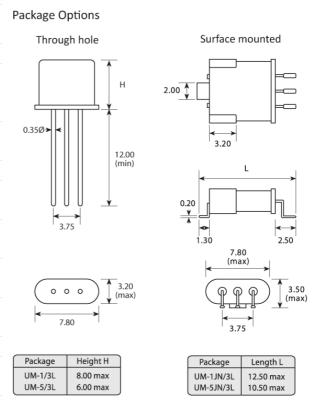

Dimensions in mm

#### **ORDERING INFORMATION**

To request a quotation for the GMCF-21 21G12A please use the configurable options form to choose the options you require and then submit your configured product to our team. Our expert advisers are always happy to help with your requirements and can be contacted on +44 1460 256 100 or at <a href="mailto:sales@golledge.com">sales@golledge.com</a>.

Following product selection you will be issued with a seven character Golledge part number. Your Golledge part number is the internationally accepted Golledge manufacturing part number (MPN) that should be used for all project documentation, including bills of materials (BoMs) and purchase orders.

If you have any queries regarding any of our documentation our dedicated sales team will be happy to help.

#### **HANDLING & STORAGE**



Human Body Model (HBM) 1A (250V to <500V)



Moisture Sensitivity Level (MSL): 1 (or not applicable)



#### **CONSTRUCTION**

Resistance weld

#### **COMPLIANCE**



**P6** Lead-free (< 0.1% by weight)



RoHS compliant with no exemptions. See our

declaration



See our statement



Au Ta Sn W Free of conflict minerals. See our declaration



Free of Halogens. See our declaration



Free of Ozone-depleting substances. <u>See our</u>

declaration