

GMCF-45 45G15A3

45MHz 2 pole crystal filter with 15.0kHz 3dB bandwidth

- Custom specifications available
- Fundamental or 3rd overtone modes
- Comprehensive stocks




CONFIGURABLE OPTIONS		
Parameter	Option Code	
Package		
Any		
UM-1/3L (leaded)		
UM-5/3L (leaded)		
UM-1JN/3L (SMT)		
UM-5JN/3L (SMT)		



SPECIFICATIONS

PACKAGE DRAWING

Centre frequency45.0MHzDimensionsPackage options available - see Package DrawingOperating temperature range-20 to +70°CNumber of poles2Pass band-3dB @ ±7.5kHz minAttenuation band-18dB @ ±28.0kHz maxIn-band ipple1.0dB maxInsertion loss2.0dB maxGuaranteed attenuation -35dB max +500 ~ +1000kHzTermination Package4000Ω // -1.0pFPackage styleUM-1/3L, UM-5/3L (through-hole)StyleUM-1JN/3L, UM-5JN/3L (SMT)		
Operating temperature range Number of 2 poles Pass band -3dB @ ±7.5kHz min Attenuation band In-band 1.0dB max ripple Insertion 2.0dB max loss Guaranteed -35dB max +500 ~ +1000kHz attenuation -35dB max -200 ~ -1000kHz Termination 4000Ω // -1.0pF Package UM-1/3L, UM-5/3L (through-hole)	_	45.0MHz
temperature range Number of 2 poles Pass band -3dB @ ±7.5kHz min Attenuation -18dB @ ±28.0kHz max band In-band 1.0dB max ripple Insertion 2.0dB max loss Guaranteed -35dB max +500 ~ +1000kHz attenuation -35dB max -200 ~ -1000kHz Termination 4000Ω // -1.0pF Package UM-1/3L, UM-5/3L (through-hole)	Dimensions	Package options available - see Package Drawing
poles Pass band -3dB @ ±7.5kHz min Attenuation -18dB @ ±28.0kHz max band In-band 1.0dB max ripple Insertion 2.0dB max loss Guaranteed -35dB max +500 ~ +1000kHz attenuation -35dB max -200 ~ -1000kHz Termination 4000Ω // -1.0pF Package UM-1/3L, UM-5/3L (through-hole)	temperature	-20 to +70°C
Attenuation band In-band 1.0dB max ripple Insertion 2.0dB max loss Guaranteed -35dB max +500 ~ +1000kHz attenuation -35dB max -200 ~ -1000kHz Termination 4000Ω // -1.0pF Package UM-1/3L, UM-5/3L (through-hole)		2
band In-band In-band Insertion Inse	Pass band	-3dB @ ±7.5kHz min
ripple Insertion 2.0dB max loss Guaranteed -35dB max +500 ~ +1000kHz attenuation -35dB max -200 ~ -1000kHz Termination 4000Ω // -1.0pF Package UM-1/3L, UM-5/3L (through-hole)		-18dB @ ±28.0kHz max
Ioss Guaranteed -35dB max +500 ~ +1000kHz attenuation -35dB max -200 ~ -1000kHz Termination 4000Ω // -1.0pF Package UM-1/3L, UM-5/3L (through-hole)	544	1.0dB max
attenuation -35dB max -200 ~ -1000kHz Termination 4000Ω // -1.0pF Package UM-1/3L, UM-5/3L (through-hole)		2.0dB max
Package UM-1/3L, UM-5/3L (through-hole)		
_	Termination	4000Ω // -1.0pF
	_	<u> </u>

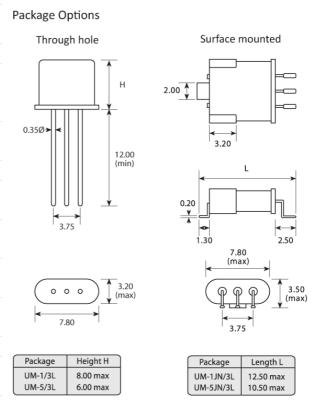

Dimensions in mm

ORDERING INFORMATION

To request a quotation for the GMCF-45 45G15A3 please use the configurable options form to choose the options you require and then submit your configured product to our team. Our expert advisers are always happy to help with your requirements and can be contacted on +44 1460 256 100 or at sales@golledge.com.

Following product selection you will be issued with a seven character Golledge part number. Your Golledge part number is the internationally accepted Golledge manufacturing part number (MPN) that should be used for all project documentation, including bills of materials (BoMs) and purchase orders.

If you have any queries regarding any of our documentation our dedicated sales team will be happy to help.

HANDLING & STORAGE



Human Body Model (HBM) 1A (250V to <500V)



Moisture Sensitivity Level (MSL): 1 (or not applicable)



CONSTRUCTION

Resistance weld

COMPLIANCE



P6 Lead-free (< 0.1% by weight)



RoHS compliant with no exemptions. See our

declaration



See our statement



Au Ta Sn W Free of conflict minerals. See our declaration



Free of Halogens. See our declaration



Free of Ozone-depleting substances. <u>See our</u>

declaration