

GMCF-45 45G7A1

45MHz 2 pole crystal filter with 7.5kHz 3dB bandwidth

- Custom specifications available
- Fundamental or 3rd overtone modes
- Comprehensive stocks




CONFIGURABLE OPTIONS	
Parameter	Option Code
Package	
Any	
UM-1/3L (leaded)	
UM-5/3L (leaded)	
UM-1JN/3L (SMT)	
UM-5JN/3L (SMT)	



SPECIFICATIONS

PACKAGE DRAWING

Caratana	/ E ON M I -
CCITA	45.0MHz
frequency	
Dimensions	Package options available - see Package Drawing
Operating	-20 to +70°C
temperature	
range	
Number of	2
poles	
Pass band	-3dB @ ±3.75kHz min
Attenuation	-10dB @ ±12.5kHz max
band	
In-band	1.0dB max
ripple	
Insertion	2.5dB max
loss	
Guaranteed	-65dB max ±910kHz
attenuation	
Termination	300Ω // 10.0pF
Package	UM-1/3L, UM-5/3L (through-hole)
style	UM-1JN/3L, UM-5JN/3L (SMT)

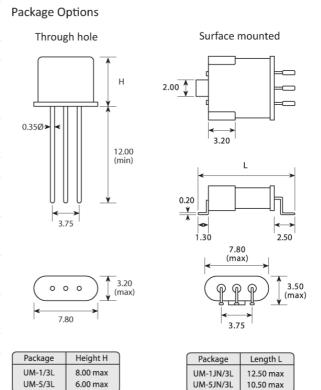

Dimensions in mm

ORDERING INFORMATION

To request a quotation for the GMCF-45 45G7A1 please use the configurable options form to choose the options you require and then submit your configured product to our team. Our expert advisers are always happy to help with your requirements and can be contacted on +44 1460 256 100 or at sales@golledge.com.

Following product selection you will be issued with a seven character Golledge part number. Your Golledge part number is the internationally accepted Golledge manufacturing part number (MPN) that should be used for all project documentation, including bills of materials (BoMs) and purchase orders.

If you have any queries regarding any of our documentation our dedicated sales team will be happy to help.

HANDLING & STORAGE



Human Body Model (HBM) 1A (250V to <500V)



Moisture Sensitivity Level (MSL): 1 (or not applicable)



CONSTRUCTION

Resistance weld

COMPLIANCE



P6 Lead-free (< 0.1% by weight)



RoHS compliant with no exemptions. See our

declaration



See our statement



Au Ta Sn W Free of conflict minerals. See our declaration



Free of Halogens. See our declaration



Free of Ozone-depleting substances. <u>See our</u>

declaration