


GMCF-HF 70G20A

70MHz 2 pole crystal filter with 20.0kHz 3dB bandwidth

- Standard models available from stock
- Custom specifications available




CONFIGURABLE OPTIONS	
Parameter	Option Code
Package	
Any	
UM-1/3L (through-hole)	
UM-5/3L (through-hole)	
UM-1JN/3L (SMT)	
UM-5JN/3L (SMT)	



SPECIFICATIONS

PACKAGE DRAWING

Centre frequency	70.0MHz
Dimensions	Package options available - see Package Drawing
Operating temperature range	-20 to +70°C
Number of poles	2
Pass band	-3dB @ ±10.0kHz min
Attenuation band	-15dB @ ±40.0kHz max
In-band ripple	1.0dB max
Insertion loss	2.0dB max
Guaranteed attenuation	-35dB max +500 ~ +1000kHz -35dB max -200 ~ -1000kHz
Termination	2500Ω // -1.0pF
Б	UM-1/3L, UM-5/3L (through-hole)
Package style	UM-1JN/3L, UM-5JN/3L (SMT)

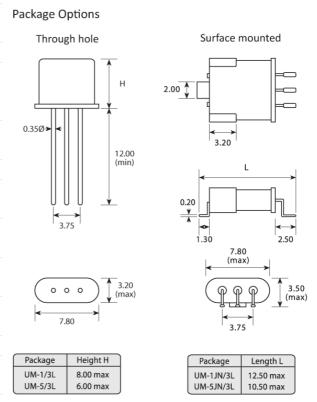

Dimensions in mm

ORDERING INFORMATION

To request a quotation for the GMCF-HF 70G20A please use the configurable options form to choose the options you require and then submit your configured product to our team. Our expert advisers are always happy to help with your requirements and can be contacted on +44 1460 256 100 or at sales@golledge.com.

Following product selection you will be issued with a seven character Golledge part number. Your Golledge part number is the internationally accepted Golledge manufacturing part number (MPN) that should be used for all project documentation, including bills of materials (BoMs) and purchase orders.

If you have any queries regarding any of our documentation our dedicated sales team will be happy to help.

HANDLING & STORAGE



Human Body Model (HBM) 1A (250V to <500V)



Moisture Sensitivity Level (MSL): 1 (or not applicable)



CONSTRUCTION

Resistance weld

COMPLIANCE



P6 Lead-free (< 0.1% by weight)



RoHS compliant with no exemptions. See our

declaration



REACH compliant. See our statement



Au Ta Sn W Free of conflict minerals. See our declaration



Free of Halogens. See our declaration



Free of Ozone-depleting substances. <u>See our</u>

declaration