

GTXO-86V

Sinewave VCTCXO High Precision High Temperature

- High Precision $\pm 0.1\text{ppm}$
- High Temperature Operation $+105^\circ\text{C}$
- Tristate Function
- Clipped sine output
- Voltage Control




CONFIGURABLE OPTIONS


Parameter	Option Code
Frequency	
Frequency stability	
Any	
$\pm 0.05\text{ppm}$	A
$\pm 0.1\text{ppm}$	B
$\pm 0.2\text{ppm}$	P
$\pm 0.28\text{ppm}$	D
$\pm 0.5\text{ppm}$	E
$\pm 1.0\text{ppm}$	F
Temperature range	
Any	
-20 to $+70^\circ\text{C}$	N
-40 to $+85^\circ\text{C}$	I
-40 to $+95^\circ\text{C}$	E
-40 to $+105^\circ\text{C}$	D
Supply voltage (V_{DD})	
Any	
$+3.3\text{V} \pm 5\%$	L
$+2.5\text{V} \pm 5\%$	J

SPECIFICATIONS

Frequency range	10.0 ~ 52.0MHz
Dimensions	5.0 x 3.2 x 1.95
Storage temperature range	-55 to +125 °C
Supply voltage stability	±0.1ppm, V_{DD} ±5%
Ageing	±1.0ppm max first year
Supply current	5.0mA max
Output waveform	Clipped sine, 0.8V p-p, +DC offset
Load (Z_L)	10kΩ // 10pF
Start up time	5ms max
Frequency adjustment	±5ppm, +1.5V ±1.0V
Phase noise (typ @ 20.0MHz)	-122dBc/Hz @ 100Hz -142dBc/Hz @ 1kHz -154dBc/Hz @ 10kHz -157dBc/Hz @ 100kHz -159dBc/Hz @ 1MHz
Frequency Tolerance @25 °C	±1.0ppm max

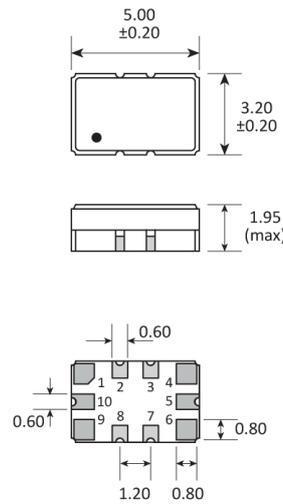PACKAGE DRAWING


NOTE: To ensure optimal oscillator performance, place a by-pass capacitor of 0.1μF as close to the part as possible between Vdd and GND pads, plus one of 0.033μF from pad 7 to ground.

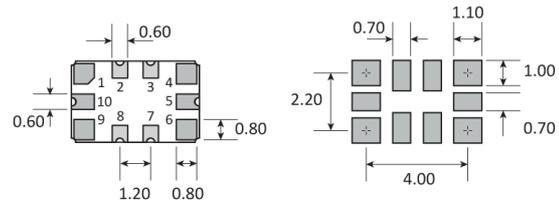SOLDER PAD LAYOUT


TOP VIEW

PAD	CONNECTION
1	Control voltage
2	Do not connect
3	Do not connect
4	Ground
5	Enable / disable
6	Output
7	VC filter
8	Not connected
9	Supply (Vdd)
10	Ground

Dimensions in mm

ORDERING INFORMATION


To request a quotation for the GTXO-86V please use the configurable options form to choose the options you require and then submit your configured product to our team. Our expert advisers are always happy to help with your requirements and can be contacted on +44 1460 256 100 or at sales@golledge.com.

Once we've received your request our expert team will then produce a quotation tailored to meet your needs using the option codes you've selected.

Following product selection you will be issued with a seven character Golledge part number. Your Golledge part number is the internationally accepted Golledge manufacturing part number (MPN) that should be used for all project documentation, including bills of materials (BoMs) and purchase orders.


If you have any queries regarding any of our documentation our dedicated sales team will be happy to help.

MARKING




- Pin 1
- Marking type: Laser
DC = Date code

SOLDERING PROFILE

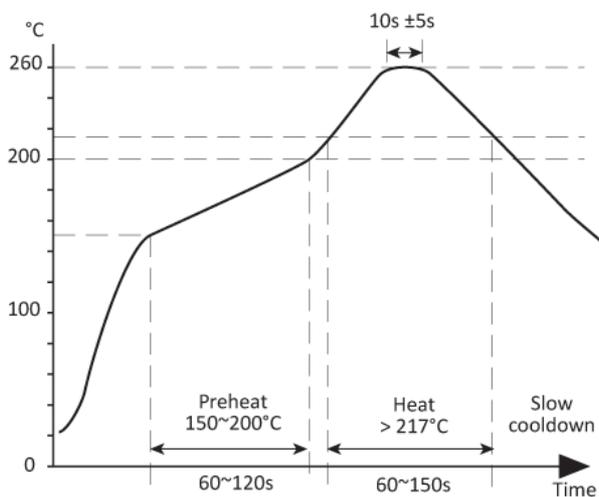

Lead free solderability limits: 260°C ± 5°C x 10s ± 5s x 2.

TAPE & REEL SPECIFICATION

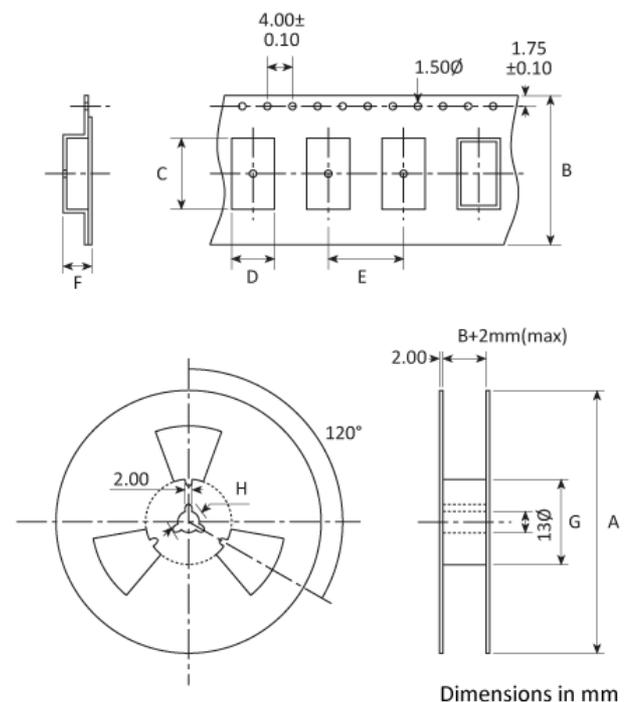

A:180 / B:13.0 / C:5.3 / D:3.5 / E:8.0 / F:1.9 / G:61

HANDLING & STORAGE



Human Body Model (HBM) 1A (250V to <500V)



Moisture Sensitivity Level (MSL): 1 (or not applicable)

COMPLIANCE



Lead-free (< 0.1% by weight)



RoHS compliant with no exemptions. [See our declaration](#)



REACH compliant. [See our statement](#)



Free of conflict minerals. [See our declaration](#)



Free of Halogens. [See our declaration](#)



Free of Ozone-depleting substances. [See our declaration](#)