

HCD665

Fast Warm Up OCXO with Sine Output and European Pin-out

- Fast warm up
- Temperature stability down to 1ppb
- Single 12V supply (12V ~ 30V optional)
- Standard European pin-out
- Custom options available




CONFIGURABLE OPTIONS

Parameter	Option Code
Frequency	
Ageing per day (at despatch)	
Any	
< 1x10 ⁻⁹	D
< 5x10 ⁻¹⁰	E
< 2x10 ⁻¹⁰	F
Temperature stability	
Any	
< 1x10 ⁻⁸	R
< 5x10 ⁻⁹	S
< 3x10 ⁻⁹	T
< 1x10 ⁻⁹	V
Operating temperature range	
Any	
0 to +50 °C	A
-10 to +60 °C	C
-20 to +70 °C	F
-40 to +70 °C	G
Output waveform	
Sine wave, 7dBm (±1dBm) into 50Ω	
Other options to +13dBm max	
Supply voltage (V _{DD})	
+12V (±0.5V)	N
Other options from 12~30V	
Close-in phase noise (@ 5.0MHz)	
Any	
< -110 dBc/Hz @ 1Hz, <-135 @ 10Hz	
< -123 dBc/Hz @ 1Hz, <-140 @ 10Hz	Z
< -150 dBc/Hz @ 100Hz	
Close-in phase noise (@ 10.0MHz)	
Any	
< -95 dBc/Hz @ 1Hz, <-130 @ 10Hz	
< -108 dBc/Hz @ 1Hz, <-135 @ 10Hz	Z
< -145 dBc/Hz @ 100Hz	


SPECIFICATIONS

Frequency range	5.0 ~ 20.0MHz
Dimensions	51.0 x 41.0 x 24.5mm
Frequency stability	< 2×10^{-8} per year < 1×10^{-9} per 10% change in V_{DD} < 5×10^{-10} per 10% change in load
Storage temperature range	-40 to +90°C
Frequency adjustment	$\pm 5 \times 10^{-7}$ (typ) over +0.5 to +7.0V (sufficient for 10 years ageing min) Stabilised +7.0V supply provided
Power consumption	10.0W max at switch on 1.3W typ when stabilised at 25°C
Warm up	< $\pm 1 \times 10^{-8}$ after 2.25mins at +25°C
Allan deviation (ADEV), 1 sec	< 5×10^{-13} (5.0MHz) < 1×10^{-12} (10.0MHz)
Far-out phase noise (all freqs)	< -155 dBc/Hz @ 1kHz < -157 dBc/Hz @ 10kHz < -157 dBc/Hz @ 100kHz
Harmonics	< -30dB wrt carrier

PACKAGE DRAWING

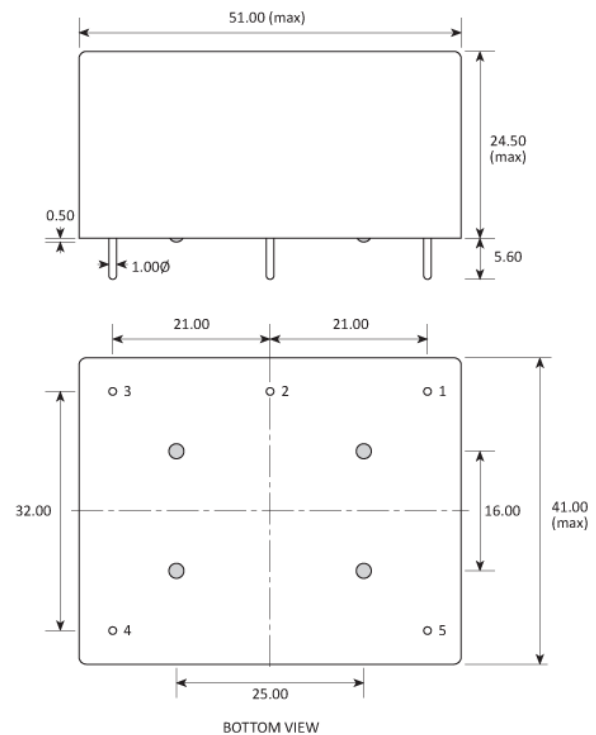

PIN	CONNECTION
1	Ground
2	Freq adjustment
3	Ref voltage out
4	Supply
5	RF output



Dimensions in mm

ORDERING INFORMATION

To request a quotation for the HCD665 please use the configurable options form to choose the options you require and then submit your configured product to our team. Our expert advisers are always happy to help with your requirements and can be contacted on +44 1460 256 100 or at sales@golledge.com.

Following product selection you will be issued with a seven character Golledge part number. Your Golledge part number is the internationally accepted Golledge manufacturing part number (MPN) that should be used for all project documentation, including bills of materials (BoMs) and purchase orders.

If you have any queries regarding any of our documentation our dedicated sales team will be happy to help.

CONSTRUCTION

Solder sealed metal can

HANDLING & STORAGE



Human Body Model (HBM) 1A (250V to <500V)



Moisture Sensitivity Level (MSL): 1 (or not applicable)

COMPLIANCE



Lead-free (< 0.1% by weight)



RoHS compliant with no exemptions. [See our declaration](#)



REACH compliant. [See our statement](#)



Free of conflict minerals. [See our declaration](#)



Free of Halogens. [See our declaration](#)



Free of Ozone-depleting substances. [See our declaration](#)